










# WIFLY EXR QAIZBAR IP

1226100294 WIFLY EXR HEX PAR

1226100313

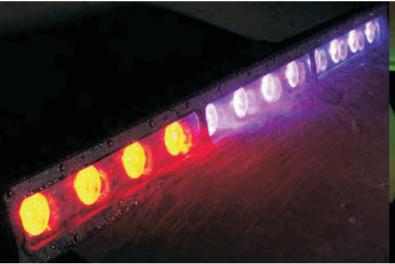



## Specification

- Light Source: IP65, Outdoor Rated, par fixture with 12x 5-Watt QUAD LEDs (4-in-1 RGBA- Red, Green, Blue & Amber LEDs, rated at approximately 50,000 hrs)
- 4-button DMX Menu display on rear
- Built-in WiFLY wireless DMX: compatible with ADJ's WiFLY Transceiver (sold separately)
- Extended wireless range up to 2500 ft/760m
- 3 Zone Control
- Creates no RGBA shadows / 64 built-in Color Macros
- Compatible with ADJ RFC wireless remote control (sold separately)
- Modes: Color Change; Color Jumping; Color Dreaming: Auto (Program Run); Sound Active, WiFLY and DMX Controlled
- DMX Channel modes: 4, 6, 7, 8, 9, 12 and 14
- Beam angle: 25-degree / Linkable via 3-pin IP cable (In/Out)
- Total power consumption: 75W / Multi-voltage operation: AC 100-240V, 50/60Hz
- Dimensions (LxWxH): 40.5" x 5.5" x 6" in. / 1029 x 140 x 152 mm
- Weight: 14 lb. / 6.4 kg.




### Specification

- 5x 10-Watt Hex LEDs (6-in-1 RGBWA+UV- Red, Green, Blue, White, Amber, & UV LEDs, rated at approximately 50,000 hrs)
- Rechargeable Lithium battery powered, with wireless DMX
- 4-button DMX menu display on rear panel
- Built-in WiFLY wireless DMX: Up to 2,500 feet (760M) when used with ADJ's WiFLY EXR Battery Transceiver
- 16 Color Change Modes / 16 Color Fade Modes / 63 built-in Color Macros
- Compatible with ADJ RFC wireless remote control (sold separately)
- 5 Operational modes: RGBWA+UV Dimmer Mode; Sound Active mode; Auto Run Mode (16 color change modes, 16 color fade modes, & 1 color/fade combo mode); Static Color mode; and DMX Controlled
- 5 DMX Channel modes: 6, 7, 8, 11 or 12 channel modes
- Beam angle: 40-degree / Linkable via 3-pin IP cable (In/Out)
- Battery Charge Time: 5 Hours (With POWER switch Off)
- Battery Life: Up to 16 hrs
- Power Draw: 58W total (All LED's @ Full On)
- Dimensions (LxWxH): 10.5" x 9.5" x 6.5" / 265 x 240 x 164mm
- Weight: 12 lbs. / 4.42kg.

## Photometric

100							
R	D25	1676	925	557	373	252	
G	D25	1581	806	466	291	197	
В	D25	1880	827	441	293	200	
Α	D25	871	544	264	160	101	(LUX)
RGBA	D25	5120	2350	1435	874	496	
KODA	020	0120	2000	1400	014	400	_



#### RGBAW Color Mixing + UV:

