


DINA-SR1

19-inch rack mounted lighting controller

Derived from the DINA-DR1, the DINA-SR1 offers the same possibilities in a different housing format. When the DR1 has been designed for DIN rail mounting the SR1 comes in a 19-inch rack format.

SR1	2000 SCENES	20 ZONES	3072 CHANNELS
-----	----------------	-------------	------------------

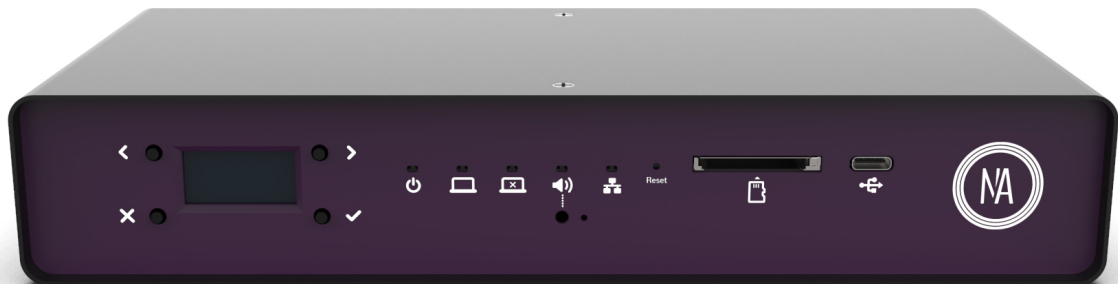

Distributed by:
AMLUX s.r.l.
46042 Castel Goffredo (MN)
info@amlux.it - www.amlux.it

The perfect lighting control solution for integration with

AV and home automation installations



The DINA-SR1 offers the same features as the DINA-DR1 (3072 channels, DALI, LED pixel, Audio, TCP, ports...) but with a strong metal housing.

This version has been specifically designed for 19-inch rack installations and can easily be integrated with other systems: AV, home automation...

The use of standard connectors like XLR for DMX or mini-jack 3.5mm for Audio offers a perfect compatibility with AV installations.

DINA-SR1 technical specifications

General

Dimensions (w/o brackets)	240 x 115 x 44 mm
Weight (w/o brackets)	830g
USB connection	
Ethernet connection	
OUTPUT channels	3072 (DMX, eDMX, LED pixel)
Scalable	Available 2021
RDM	
LED Pixel output	Available 2021
eDMX	Available 2021
DALI	Available 2021
Memory capacity	16 MB
SD card	
LS Cloud	Available 2021

Stand Alone

Number of scenes	2000
Number of zones	20
Power voltage	8-15V DC
Power connector	USB

Triggering

Ports	8
Clock/calendar triggers	
RS232	
Ethernet integration	
AUDIO	
DALI	Available 2021
Remote control apps	iOS/Android

Programming software/app

ESA2	PC/Mac
ESA Pro 2	PC/Mac
Arcolis	iOS/Android