




FLASH KLING BATTEN

1226200048



FLASH KLING STRIP

1226300051

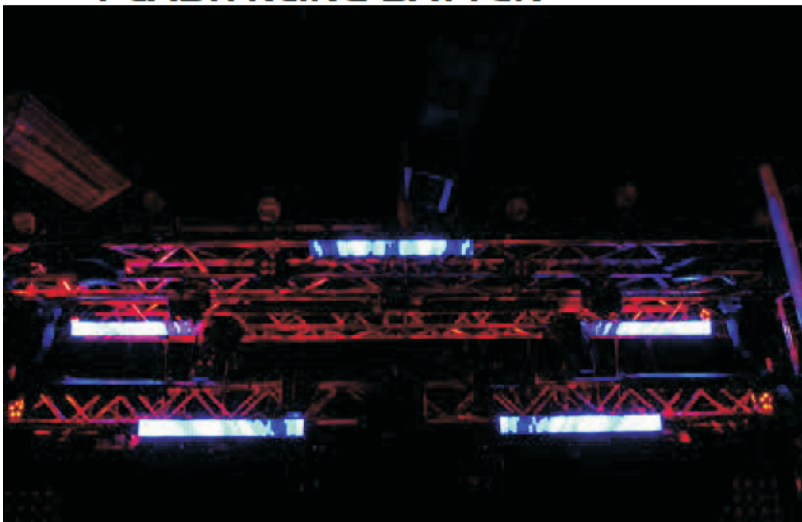

Specification


- LED Pixel panel for, low resolution, video displays
- 160 x 0.164W SMD RGB 3-in1 LED's (40x4 Matrix Configuration)
- 120-Degree Beam Angle
- KlingNet and ArtNet compatible. Recommended control solutions; Arkaos Media Master Express, Media Master Pro and LED Master software's (sold separately).
- RJ45 Connection
- Electronic Dimming 0-100% (via software)
- AC 100V-240V 50/60Hz
- Power Cord Daisy Chain up to 12 fixtures max.
- Power Consumption: 54W
- Dimensions (LxWxH): 39.25" x 4" x 5.5" / 1000 x 104 x 140mm
- Weight: 7.27 lbs. / 3.3 Kgs.

Specification

- 40 x 0.164W SMD RGB 3-in1 LED's (40x2 Matrix Configuration)
- LED Pixel panel for, low resolution, video displays
- 120-Degree Beam Angle
- KlingNet and ArtNet compatible. Recommended control solutions; Arkaos Media Master Express, Media Master Pro and LED Master software's (sold separately).
- RJ45 Connection
- Electronic Dimming 0-100% (via software)
- AC 100V-240V 50/60Hz
- Power Cord Daisy Chain up to 22 fixtures max.
- Power Consumption: 28W
- Dimensions (LxWxH): 39.25" x 2.25" x 5.5" / 1000 x 59 x 140mm
- Weight: 6 lbs. / 2.7 Kgs.

Photometric

R	115.2	22.4	8.2	4.8	3.6	2.1	(LUX)
G	153.7	36.6	12.4	8.6	4.5	3.8	
B	160	39.3	12.8	6.8	4.7	3.6	
RGB	405	108	36.2	21.7	13.5	9.6	

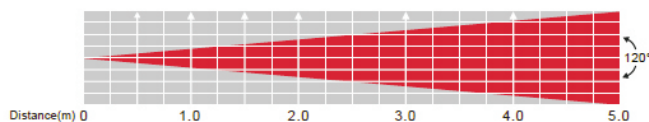

Photometric

R	77.2	21.2	5.5	2.7	1.6	1.1	(LUX)
G	85.5	27.4	7.6	3.6	2.1	1.4	
B	81.4	23.6	6.2	2.9	1.8	1.3	
RGB	211	76.5	18.8	9.2	5.5	3.8	

