

# AV6X

**NEW!**

1226300054

**SPECIFICATIONS:**

- Pixel Pitch: 6.0mm (0.25")
- LED Configuration: 3-in-1 SMD2121 LED
- Pixel Density: 96x96; 27,777 per square meter
- For indoor use only
- Size: 576 x 576 x 75mm / 22.75" x 22.75" x 3"
- Module Quantity: 4
- Weight: 23lbs. / 8.15Kg
- ETL Approved

**MECHANICAL RATINGS:**

- Surface Flatness: Gaps<0.5mm

**OPTICAL RATINGS:**

- Brightness: 1200 NITS
- View Angle: Horizontal 140°/Vertical 140°
- Distance: 20ft (6m)
- Gray Scale / Display Color: 14Bit
- Brightness Adjustment: 0~100% 100 Levels
- Processing: 14Bit


**POWER SUPPLY:**

- Operation Power: 100~240V 50-60Hz
- Max. Power Consumption: 300W/per panel
- Ave. Power Consumption: 120W/per panel
- Connections Power/Data: Power-PowerCon In/Out; Data EtherCon In/Out



**ENVIRONMENTAL:** • Operating Temp / Humidity: Fahrenheit: -4° + 104° / Celsius: -20°

- + 40° / 10-90% (No Condensation)
- Operating Life / MTBF: 100,000 Hours / 5,000 Hours
- Protection Level: IP20 (Front and Back)
- Out of Control Rate: <0.02%
- Listings: CE, FCC Class A, RoHS, China RoHS, ETL

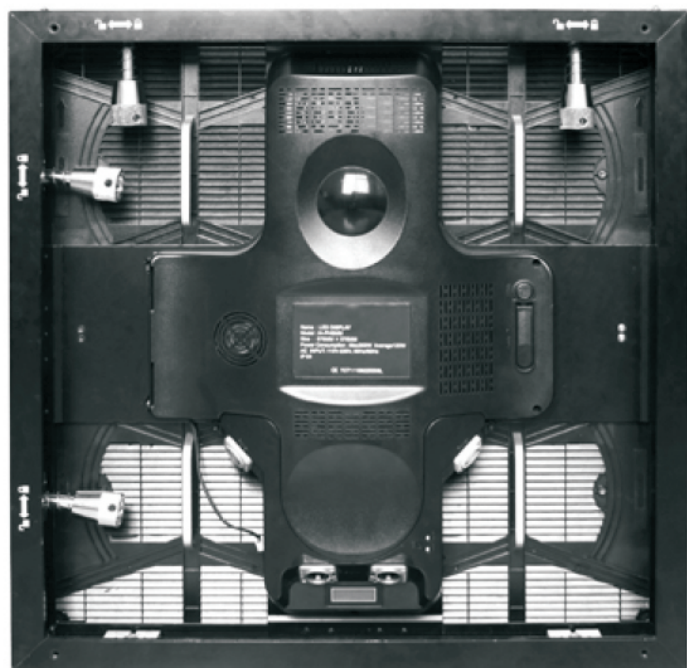

## AV6RB2 Rigging Bar.


- Single panel rigging bar for AV6X
- Up to 20 panels max vertical hang



1226300053

## ADJ TOURING CASE 8X AV6X

- Fits 8 AV6X video panels
- 9mm Plywood
- Butterfly Latches
- Swivel Castors
- Outer dimensions (LxWxH): 39.8" x 26" x 32.3" (1.01 x 0.66 x 0.82m)

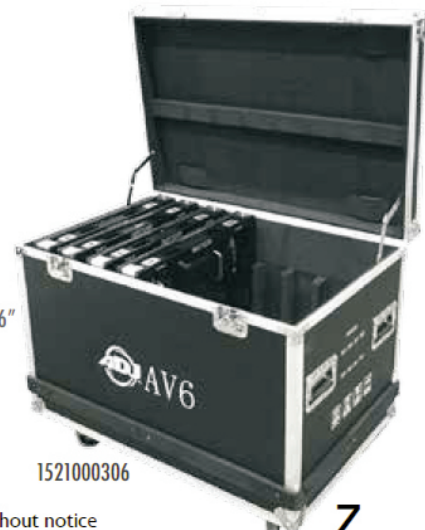

1521000306