

## Applications

Beam style	variable-spread, soft-edged beam
Suitable for	theatre, clubs, small stage areas
Specification level	economy range
Beam angle	7° - 58°
Typical throw distance	2-10

## Electrical specifications

Supply volts	230/240V AC single phase
Max. lamp Watts	650W
Lamp-base	GY9.5
Auto-disconnect	no
Cable/connection	1.5m, black flexible cable 3 x 1.5mm <sup>2</sup>
Standard compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint finish	black epoxy power paint
Lamp house construction	extruded alluminium and sheet steel
Reflector	ø55mm, glass
Lens	fresnel, ø120mm pebble convex
Mounting & Sospension	steel stirrup with 12 mm centre hole and DIN mounting. Stirrup rotates 360° around the body of the luminaire
Rear handle	posterior
Weight/ packed weight	4.2 kg / 4,8 kg
packed volume	0.021m <sup>3</sup>
Filter cut size	150 x 150mm
Accessory runners	3slots
Safety guards	included
Colour frame	metal, 150x150mm, supplied
Lamp access	sliding top cover
Lens access	front and via lamp access

## Operational specifications

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±90° from horizontal
Beam Shaping	using barndoor accessory
Positional	single rim-clamp tilt lock

## Lamp type

300W	M38 2950K 2000 hrs
500W	T18 3000K 360 hrs / T25 3000K 360 hrs / M40 2950K 2.000 hrs
650W	T26 3050K 600 hrs / T27 3050K 600 hrs

LDR recommends Philips lamps

## Accessories

Spare metal colour frame	■20100103 □20100103B ■20100103C
Spare safety guard	■20100203 □20100203B ■20100203C
4-leaf barndoor	■20100303 □20100303B ■20100303C □■20100303D ■■20100303E
Hock clamp	20100900 Alu-grip clamp 20101100
Safety band	20101200
Colour scroller Xpress 13	20106013 with mounting plate 20600003

## Photometric Data

spot focus	T27									
BeamØ	0.2	0.4	0.5	0.6	0.7	0.9	1.0	1.1	1.2m	
lux	24800	11022	6200	3968	2756	2024	1550	1225	992	
Distance	2	3	4	5	6	7	8	9	10m	


Flood focus										
BeamØ	2.2	3.3	4.4	5.5	6.7	7.8	8.9	10	11.1m	
lux	2148	955	537	344	239	175	134	106	86	
Distance	2	3	4	5	6	7	8	9	10m	

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# TEMPO<sup>®</sup> PC650 plus

650W Pebble-convex

part num: ■ 10602000 □ 10602001 ■ 10602002

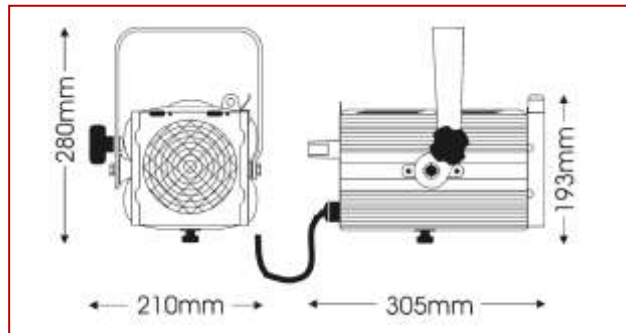

Simple yet high-quality 650W PC spotlight featuring a slide-focus variable-spread beam to offer more definition than the softer Fresnel beam.

Tempo pc650 plus is ideal for close projection in small stage venues and whenever budget is a priority. A colour frame, safety guard and 1.5m mains cable are all included as standard.

Available to special order in any colour from the RAL range



Distributed by:  
**AMLUX s.r.l.**  
 Via Belgio, 11/13  
 46042 Castel Goffredo (MN), Italy  
[www.amlux.it](http://www.amlux.it) [info@amlux.it](mailto:info@amlux.it)