

Applications

Beam style	well defined, flat field profile projector
Suitable for	small to medium scale theater
Specification level	professional range
Beam angle	10° - 28°
Typical throw distance	2-15 m

Electrical specifications

Supply volts	230/240V AC single phase
Max. lamp Watts	650W
Lamp-base	GY9.5
Auto-disconnect	double-pole microswitch
Cable/connection	1.5m, black flexible cable to bare ends 3 x 1.5mm ²
Standard compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/ Finish	black, white, silver epoxy power paint
Lamp house construction	extruded aluminium and sheet steel
Reflector	ø55mm, aluminium
Lens	double condenser with variable zoom
Mounting & Suspension	steel stirrup with 12 mm centre hole and DIN mounting.
Rear handle	yes
Weight/ packed weight	7.5 kg / 9.3 kg
packed volume	0.068m ³
Filter cut size	125 x 125mm
Gobo size	M/D, metal
Rotating gate	yes, 4 for shutter
Accessory runners	3 slots
Safety guards	included
Colour frame	metal, 125x125mm, supplied
Lamp access	hinged base
Lens access	sliding panels on top of lamp and zoom tube

Operational specifications

Focus adjustment	slide zoom controls (dia end softness) and side
Working position	max. tilting ±70° from horizontal
Beam Shaping	4 shutters, supplied + iris, accessory
Positional	single rim-clamp tilt lock

Lamp type

300W	M38 2950K 2000 hrs
500W	T18 3000K 360 hrs/ T25 3000K 360 hrs M40 2950K 2.000 hrs
650W	T26 3050K 600 hrs/ T27 3050K 600 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■ 20100102	□ 20100102B	■ 20100102C
Spare safety guard	■ 20100202	□ 20100202B	■ 20100202C
iris diaphragm	20100707	Gobo holder M/D size	20100801
Hock clamp	20100900	Alu-grip clamp	20101100
Safety bond	20101200		
Colour scroller Xpress 13	20106013 with mounting plate	20600002	

Photometric Data

Narrow focus											T27
BeamØ	1.2	1.4	1.6	1.7	1.9	2.1	2.3	2.4	2.6	m	
lux	1071	820	648	525	434	365	311	268	233		
Distance	7	8	9	10	11	12	13	14	15	m	


Wide focus										
BeamØ	1	1.5	2	2.5	3	3.5	4	4.5	5	m
lux	6625	2944	1656	1060	736	541	414	327	265	
Distance	2	3	4	5	6	7	8	9	10	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

SUONO[®] 10/28 plus

300W - 650W profile spotlight

part number: ■ 10604020 □ 10604021 ■ 10604022

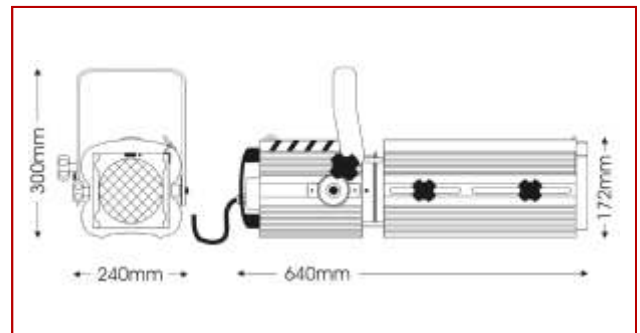

Compact and high-specification 500W/650W profile spotlight with a double-condenser zoom focus optical system to provide crisp projection of gobos and a brilliant flat beam between 10° and 28°.

Features include a rotating gate, zoom controls on teflon sleeves, hinged lamp tray and double microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 1.5m mains cable are all included as standard.



Distributed by:
AMLUX s.r.l.
Via Belgio, 11/13
46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it