

Applications

Beam style	well defined, flat field profile projector
Suitable for	medium scale theater
Specification level	professional range
Beam angle	18° - 36°
Typical throw distance	5 - 18 m

Electrical specifications

Supply volts	230/240V AC single phase
Max. lamp Watts	1200W
Lamp-base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, black flexible cable to bare ends 3 x 1.5mm ²
Standard compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/ Finish	black, white, silver epoxy power paint
Lamp house construction	extruded alluminium and sheet steel
Reflector	ø68mm, glass
Lens	double condenser with variable zoom
Mounting & Sospension	steel stirrup with 12 mm centre hole and DIN mounting.
Rear handle	yes
Weight/ packed weight	12.3 kg / 15 kg
packed volume	0.011m ³
Filter cut size	185 x 185mm
Gobo size	M/D, metal
Rotating gate	yes, 4 for shutter
Accessory runners	3 slots
Safety guards	included
Colour frame	metal, 185x185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia end softness) and side
Working position	max. tilting ±70° from horizontal
Beam Shaping	4 shutters, included + iris, accessory
Positional	level tilt clamp

Lamp type

650W	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■ 20100106	□ 20100106B	■ 20100106C
Spare safety guard	■ 20100206	□ 20100206B	■ 20100206C
iris diaphragm	20100706	Gobo holder M/D size	20100806
Hock clamp	20100900	Alu-grip clamp	20101100
Safety bond	20101200		
Colour scroller Xpress 19	20106019	with mounting plate	20600006

Photometric Data

Narrow focus										CP90
BeamØ	3.8	4.1	4.4	4.8	5.1	5.4	5.7	6.0	6.3	m
lux	1528	1302	1122	978	859	761	679	609	550	
Distance	12	13	14	15	16	17	18	19	20	m


Wide focus										
BeamØ	1.9	2.3	2.7	3.1	3.5	3.9	4.3	4.7	5.1	m
lux	6160	4278	3143	2406	1901	1540	1273	1069	911	
Distance	7	8	9	10	11	12	13	14	15	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

NOTA[®] 18/36

650W - 1200W
profile spotlight


part number: ■ 10853030 □ 10853031 ■ 10853032

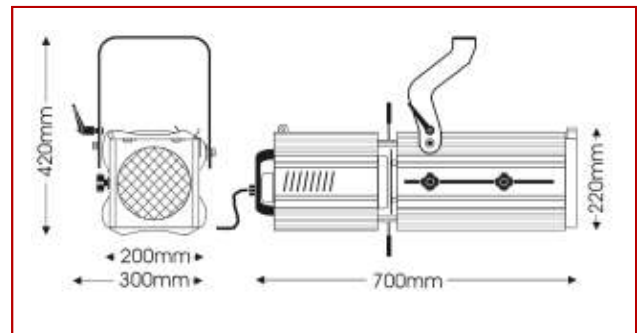

This wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection.

The comprehensive feature list includes 18°- 36° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute overstage rigging angles and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Distributed by:
AMLUX s.r.l.
Via Belgio, 11/13
46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it