

Applications

Beam style	well defined, flat field profile projection
Suitable for	medium scale theater
Specification level	professional range
Beam angle	30° - 55°
Typical throw distance	4 - 12 m

Electrical specifications

Supply volts	230/240V AC single phase
Max. lamp Watts	1200W
Lamp-base	GX9.5
Auto-disconnect	double-pole microswitch
Cable/connection	2m, black flexible cable to bare ends 3 x 1.5mm ²
Standard compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/ Finish	black, white, silver epoxy power paint
Lamp house construction	extruded alluminium and sheet steel
Reflector	ø68mm,glass
Lens	double condenser with variable zoom
Mounting & Sospension	steel stirrup with 12 mmcentre hole and DIN mounting.
Rear handle	yes
Weight/ packed weight	11.9 kg / 14.6 kg
packed volume	0.11m ³
Filter cut size	185 x 185mm
Gobo size	M/D, metal
Rotating gate	yes, 4 for shutter
Accessory runners	3slots
Safety guards	supplied
Colour frame	metal, 185x185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia end softness) and side
Working position	max. tilting ±70° from horizontal
Beam Shaping	4 shutters, supplied + iris, accessory
Positional	level tilt clamp

Lamp type

650W	CP67 3200K 120 hrs / T21 3000K 900 hrs
1000W	CP70 3200K 240 hrs / T19 3050K 900 hrs
1200W	CP90 3200K 240 hrs / T29 3000K 480 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106	□20100106B	■20100106C
Spare safety guard	■20100206	□20100206B	■20100206C
iris diaphragm	20100706	Gobo holder M/D size	20100806
Hock clamp	20100900	Alu-grip clamp	20101100
Safety bond	20101200		
Colour scroller Xpress 19	20106019	with mounting plate	20600006

Photometric Data

Narrow focus		CP90									
BeamØ	2.1	2.7	3.2	3.8	4.3	4.8	5.4	5.9	6.4	m	
lux	5594	3580	2486	1827	1398	1105	895	740	622		
Distance	4	5	6	7	8	9	10	11	12	m	


Wide focus											
BeamØ	4.2	5.2	6.2	7.3	8.3	9.4	10.4	11.5	12.5	m	
lux	1494	956	664	488	373	295	239	198	166		
Distance	4	5	6	7	8	9	10	11	12	m	

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

NOTA[®] 35/55

650W - 1200W
profile spotlight

part number: ■ 10853040 □ 10853041 ■ 10853042

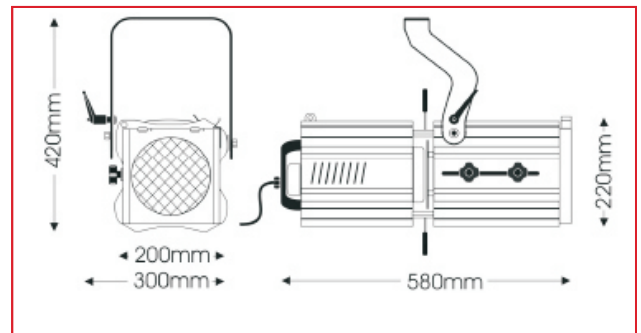

This extremely wide-angle 1000/1200W profile spotlight includes high-specification double condenser optical system for clean, crisp gobo projection.

The comprehensive feature list includes 30° - 55° zoom focus, rotating gate with 4 shutters, a cranked fork to accommodate acute overstage rigging angles and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety guard, 4 beam shutters and 2m mains cable are also included.



Distributed by:
AMLUX s.r.l.
Via Belgio, 11/13
46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it