

Applications

Beam style	well defined, flat field profile projection
Suitable for	large scale theater
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	6 - 30 m

Electrical specifications

Supply volts	230/240V AC single phase
Max. lamp Watts	2000W
Lamp-base	GY16
Auto-disconnect	double-pole microswitch
Cable/connection	2m, black flexible cable to bare ends 3 x 2.5mm ²
Standard compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/ Finish	black, epoxy power paint
Lamp house construction	extruded aluminium and sheet steel
Reflector	ø68mm, aluminium
Lens	double condenser with variable zoom
Mounting & Sospension	steel stirrup with 12 mm centre hole and DIN mounting.
Rear handle	yes
Weight/ packed weight	14.7 kg / 18 kg
packed volume	0.17m ³
Filter cut size	185 x 185mm
Gobo size	M/D, metal
Rotating gate	yes, 4 for shutter
Accessory runners	3slots
Safety guards	supplied
Colour frame	metal, 185x185mm, supplied
Lamp access	hinged base
Lens access	hinged panel on top of lamp tube

Operational specifications

Focus adjustment	slide zoom controls (dia end softness) and side
Working position	max. tilting ±70° from horizontal
Beam Shaping	4 shutters, included + iris, accessory
Positional	level tilt clamp

Lamp type

2000W	CP72 GY16 230/240V 3200K 480 hrs
-------	----------------------------------

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100106	
Spare safety guard	■20100206	
iris diaphragm	20100706	Gobo holder M/D size 20100806
Hock clamp HD	20101000	Alu-grip clamp 20101100
Safety bond	20101200	
Colour scroller Xpress 19	20106019	with mounting plate 20600006

Photometric Data

Narrow focus		CP72									
BeamØ	2.0	2.2	2.5	2.8	3.1	3.4	3.6	3.9	4.2	m	
lux	2443	1870	1478	1197	989	831	708	611	532		
Distance	14	16	18	20	22	24	26	28	30	m	


Wide focus											
BeamØ	2.3	3.1	3.9	4.7	5.4	6.2	7.0	7.8	8.6	m	
lux	5556	3152	2000	1389	1020	781	617	500	413		
Distance	6	8	10	12	14	16	18	20	22	m	

TONO[®] 8/22

2000W

profile spotlight

part number: ■ 10903020

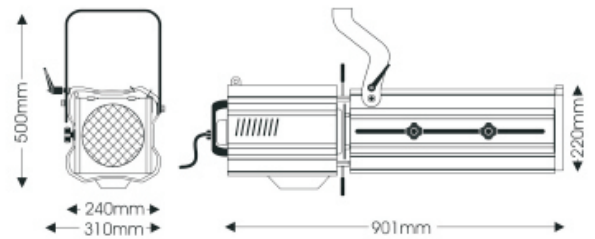

This powerful 2Kw narrow-angle profile spotlight is designed for use in larger venues which demand exceptional beam quality and gobo projection.

In addition to a double condenser optical system, features include an 8° - 22° zoom focus, rotating gate, a cranked fork and a double-microswitch interlock for a safe lamp replacement.

A colour frame, safety guard, 4 beam shutter and 2m mains cable are also supplied as standard.



Distributed by:
AMLUX s.r.l.
 Via Belgio, 11/13
 46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it