

Applications

Beam style	well-defined, flat field profile projector
Suitable for	medium / large scale theatre
Specification level	professional range
Beam angle	8° - 22°
Typical throw distance	10 - 30m

Electrical specifications

Supply volts	230/240V single phase
Max. lamp Watts	575W
Lamp-base	GX9.5
Ballast	external unit (supplied) with on/off switch
Cable/connection	2m, black flexible cable to bare ends 3 x 2.5mm ²
Standard compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/ Finish	black, white epoxy power paint
Lamp house construction	extruded alluminium and sheet steel
Reflector	ø55mm,glass
Lens	double condenser with variable zoom
Mounting & Sospension	steel stirrup with 12 mm centre hole and DIN mounting. Spigot for ø28mm tube supplied
Handle	rear and side
Weight/ packed weight	19.8 kg/ 23.7 kg - ballast 16.5 kg/ 17.5 kg
packed volume	0.068m ³ - ballast 0.049m ³
Filter cut size	185 x 185mm
Gobo size	M/D, metal
Iris	20 leaf iris included; shutters are accessories
Accessory runners	3slots
Safety guards	included
Colour frame	metal, 185 x 185mm, supplied
Lamp access	lowering base
Lens access	sliding panels beneath lamp tube

Operational specifications

Focus adjustment	slide focus with control underneath
Working position	max. tilting ±70° from horizontal
Beam Shaping	4 shutters, supplied + iris, accessory
Positional	single rim-clamp tilt lock

Lamp type

575W 6000K	Philips MSD 575 GX9.5 3.000 hrs
575W 7200K	Philips MSR 575/2 GX9.5 1.000 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	■20100103 □20100103B ■20100103C
Gobo holder M/D size	20100801
iris diaphragm	20100707
Hock clamp	20100900 Alu-grip clamp 20101100
Safety bond	20101200

Photometric Data


Narrow focus		Philips MSR 575/2									
Beam Ø		1.5	1.7	1.9	2.1	2.3	2.5	2.7	2.9	3.1	m
lux		2908	2227	1759	1425	1178	990	843	727	633	
Distance		14	16	18	20	22	24	26	28	30	m

Wide focus											
Beam Ø		2.6	3.2	3.7	4.2	4.7	5.3	5.8	6.3	6.8	m
lux		1363	946	695	532	421	341	282	237	202	
Distance		10	12	14	16	18	20	22	24	26	m

CANTO[®] 575 MK2

230V 50/60Hz discharge followspot

part number: ■ (K)10577180 □ 10577181

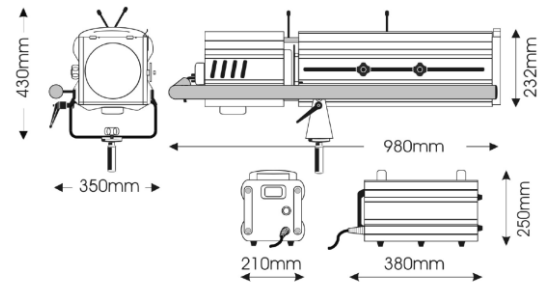

This medium-throw discharge followspot for either MSD or MSR 575 lamp has been completely re-engineered to offer the market an even wider and better set of features. A large, user-friendly side handle, new mechanics on the mechanical dimmer and a number of upgrades new features add to the existing specifications which have made Canto[®] a world-wide success.

Also included are an external ballast, iris, mechanical dimmer, spigot, colour frame and 2m mains cable. A 5-colour colour changer is available as an optional extra.



Distributed by:
AMLUX s.r.l.
Via Belgio, 11/13
46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it