

Application	
Beam style	asymmetric flood
Suitable for	small- scale theater, cyclorama lighting
Specification level	professional range
Typical throw distance	2 - 5 m

Electrical specifications	
Supply Volts	230/240V AC single phase
Max. Lamp Watts	500 W
Lamp base	R7s
Auto-disconnect	no
Cable/connection	1.5m, 3 x 1.5mm ² flexible cable to bare ends
Standard Compliance	EN60598-2-17, marchio CE

Mechanical specifications	
Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-Compartment. A full range of units and accessories for multiple row cyclorama lighting is available to separate order
Reflector	asymmetrical-aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting
Weight/Packed Weight	2 kg / 2.5 kg
Packed volume	0.017m ³
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety guard/glass	optional accessory
Colour frame	metal, 244 x 195mm, supplied
Lamp access	front access

Operational specification	
Working position	Max ±180° from horizontal
Positional adj	tilt lock on one side

Lamp types	
160W	Plusline ES Small R7s 230V 3100lm 2.000 hrs
240W	Plusline ES Small R7s 230V 4900lm 2.000 hrs
400W	Plusline ES Small R7s 230V 8700lm 2.000 hrs

LDR recommends Philips lamps

Accessories	
Colour-frame spare	■ 20100120 □ 20100120B ■ 20100120C
Safety guard	■ 20100220 □ 20100220B ■ 20100220C
4-leaf barndoor	■ 20100420 □ 20100420B ■ 20100420C □ ■ 20100420D ■ 20100420E
Hook clamp	20100900
Safety bond	20101200
Clear safety glass	20101420
Kit for linear mounting 2 rima	20102622
Kit for linear mounting 3 rima	20102623
Kit for linear mounting 4 rima	20102624
Kit for square mounting	20101920


Photometric data											
Horizontal											ES400
Beam Ø	3.1	4.7	6.3	7.8	9.4	10.9	12.5	14.1	15.6		m
lux	1585	704	396	254	176	129	99	78	63		
Distance	2	3	4	5	6	7	8	9	10		m
Vertical											
Beam Ø	1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5		m
lux	2151	956	538	344	239	176	134	106	86		
Distance	2	3	4	5	6	7	8	9	10		m

RIMA[®] A 500f

200- 500W

asymmetric floodlight


part num: ■ 10506050 □ 10506051 ■ 10506052

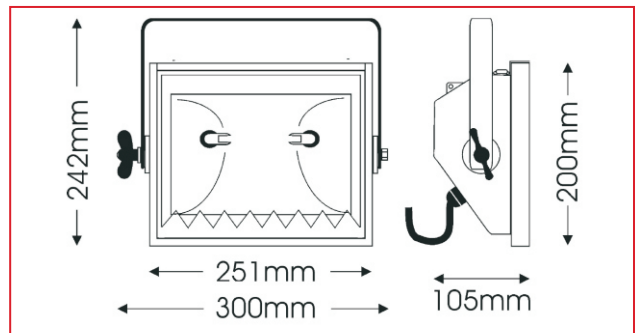

New, stylish and high specification 160W/ 240W/ 400W asymmetrical floodlights, ideal for professional usage in all cyclorama-type lighting applications.

Rima A500F is designed for usage as single module flood, but a large choice of different models and accessories is available for the creation of multiple rows or square-battens. Rima A500 is delivered complete with colour frame and 1.5m mains cable.

Available to special order with extended front chassis for longer gel life.



Distributed by:
AMLUX s.r.l.
 Via Belgio, 11/13
 46042 Castel Goffredo (MN), Italy
www.amlux.it info@amlux.it