

Application	
Beam style	symmetric flood
Suitable for	small- scale theater, batten general floodlighting
Specification level	professional range
Typical throw distance	2 - 5 m

Electrical specifications	
Supply Volts	230/240V AC single phase
Max. Lamp Watts	500 W
Lamp base	R7s
Auto-disconnect	no
Cable/connection	1.5m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standard Compliance	EN60598-2-17, marchio CE

Mechanical specifications	
Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-Compartment. A full range of units and accessories for multiple row cyclorama lighting is available to separate order
Reflector	symmetrical-aluminium
Mounting & suspension	supplied without stirrup- see list of separate hanging accessories available
Weight/Packed Weight	1.8 kg / 4.3 kg ( 2 units in a box)
Packed volume	0.021m <sup>3</sup> ( 2 units in a box)
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety guard/glass	optional accessory
Colour frame	metal, 244 x 195mm, supplied
Lamp access	front access

Operational specification	
Working position	Max ±180° from horizontal
Positional adj	tilt lock on one side when mounted in batten

Lamp types	
160W	Plusline ES Small R7s 230V 3100lm 2.000 hrs
240W	Plusline ES Small R7s 230V 4900lm 2.000 hrs
400W	Plusline ES Small R7s 230V 8700lm 2.000 hrs

LDR recommends Philips lamps

Accessories	
Colour-frame spare	■20100120 □20100120B ■20100120C
Safety guard	■20100220 □20100220B ■20100220C
4-leaf barndoor	■20100420 □20100420B ■20100420C □■20100420D ■■20100420E
Hook clamp	20100900
Safety bond	20101200
Clear safety glass	20101420
Kit for linear mounting 2 rima	20102622
Kit for linear mounting 3 rima	20102623
Kit for linear mounting 4 rima	20102624
Kit for square mounting	20101920

Photometric data											
Horizontal											ES400
Beam Ø	3.2	4.9	6.5	8.1	9.7	11.3	13	14.6	16.2		m
lux	913	406	228	146	101	74	57	45	37		
Distance	2	3	4	5	6	7	8	9	10		m


Vertical											
Beam Ø	1.9	2.9	3.8	4.8	5.7	6.7	7.6	8.6	9.5		m
lux	1345	598	336	215	149	110	84	66	54		
Distance	2	3	4	5	6	7	8	9	10		m

# RIMA<sup>®</sup> S 500f

## 200- 500W

### symmetric floodlight

part num: ■ 10506160 □ 10506161 ■ 10506162

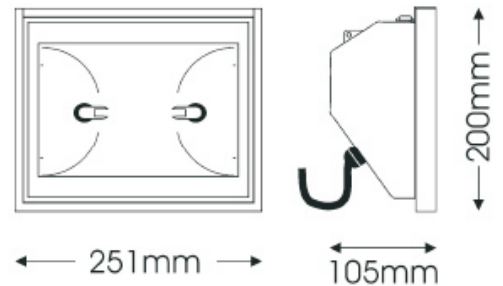

New, stylish and high specification 500W symmetric floodlights, ideal for all applications where a wide, even wash of light is required.

The modular design enables several units to be coupled together to form a single compartment or square batten. Improved design prevents any light spill. A colour frame and 1.5m mains cable are supplied as a standard whereas a large choice of accessories is available as optional extras.

**Available to special order with extended front chassis for longer gel life.**



Distributed by:  
**AMLUX s.r.l.**  
 Via Belgio, 11/13  
 46042 Castel Goffredo (MN), Italy  
[www.amlux.it](http://www.amlux.it) [info@amlux.it](mailto:info@amlux.it)