

## Application

Beam style	symmetric flood
Suitable for	general stage floodlighting
Specification level	professional range
Typical throw distance	2 - 10 m

## Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1250W
Lamp base	R7s
Auto-disconnect	double-pole,microswitch
Cable/connection	1.5m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
Standard Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-Compartment, may be coupled together with identical units to create a 2/3/4 compartment batten, available accessories for domino assembling.
Reflector	symmetrical,aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting
Weight/Packed Weight	5.3 kg / 7.1 kg
Packed volume	0.069m <sup>3</sup>
Filter cut size	290 x 270mm
Accessory runners	1slot
Safety guard/glass	included
Colour frame	metal, 290 x 270mm, supplied
Lamp access	front access

## Operational specification

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side

## Lamp types

625W	P2/10 R7s 230/240V 3200K 150 hrs
1000W	P2/7 R7s 230/240V 3200k 200 hrs
1250W	P2/12 R7s 230/240V 3200K 200 hrs

LDR recommends Philips lamps

## Accessories

Spare metal colour frame	■20100112	□20100112B	■20100112C
4-leaf barndoor	■20100492	□20100492B	■20100492C
3-leaf barndoor	■20100612	□20100612B	■20100612C
2-leaf barndoor	■20100512	□20100512B	■20100512C
2-leaf b/door sq.mounting left	20100512L		
2-leaf b/door sq.mounting right	20100512R		
Spare clear safety glass	20101412		
Kit for square mounting	20101912		
Kit for linear mounting 2/3 Innos	20102612		
Kit for linear mounting 4 Innos	20102614		
Hook clamp	20100900		
Safety bond	20101300		

## Photometric data

Horizontal		P 2/7									
Beam $\varnothing$	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0		m
lux	4875	2167	1219	750	542	398	305	241	195		
Distance	2	3	4	5	6	7	8	9	10		m

Vertical											
Beam $\varnothing$	4.4	6.5	8.7	10.9	13.1	15.3	17.5	19.6	21.8		m
lux	5125	2278	1281	820	569	418	320	253	205		
Distance	2	3	4	5	6	7	8	9	10		m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

# INNO<sup>®</sup> S 1000


## 625-1250W

### symmetric floodlight

part num: ■ 10806060 □ 10806061 ■ 10806062



Made in Italy

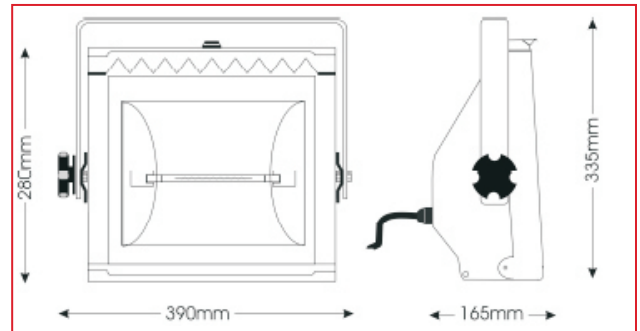

Also for larger venues, this 1000W symmetric floodlight produces a wide, even wash of light for general lighting purposes. Each unit is complete with a safety glass and a double microswitch interlock for safe lamp replacement. The modular design enables several units to be coupled together to form a compartment batten. A colour frame, safety glass and 1.5m mains cable is included as a standard.

To special order also available with extended front-door



Distributed by:  
**AMLUX s.r.l.**  
 Via Belgio, 11/13  
 46042 Castel Goffredo (MN), Italy  
[www.amlux.it](http://www.amlux.it) [info@amlux.it](mailto:info@amlux.it)