

Application

Beam style	symmetric flood
Suitable for	general stage or large venues floodlighting where the position of the luminaries needs to be changed frequently
Specification level	professional range
Typical throw distance	2 - 10m

Electrical specifications

Supply Volts	230/240V AC single phase
Max. Lamp Watts	1250W
Lamp base	R7s
Auto-disconnect	double-pole microswitch
Cable/connection	1.5m, 3x1.5mm ² flexible cable to bare ends
Standards Compliance	EN60598-2-17, CE marked

Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	steel-sheet body with hinged front access door
Reflector	symmetrical, aluminium
Mounting & suspension	pole-operated stirrup with BS spigot for the control of pan and tilt movement
Weight/Packed weight	7 kg / 9,5 kg
Packed volume	0.08m ³
Filter cut size	290 x 270mm
Accessory runners	1 slot
Safety glass	included
Colour frame	metal, 290 x 270mm supplied
Lamp access	front access

Operational specifications

Working position	max. tilting $\pm 180^\circ$ from vertical
Positional adjustment	tilt lock on one side

Lamp types

625W	P2/10 R7s 230/240V 3200K 150 hrs
1000W	P2/7 R7s 230/240V 3200k 200 hrs
1250W	P2/12 R7s 230/240V 3200K 200 hrs

LDR recommends Philips lamps

Accessories

Spare metal colour frame	<input checked="" type="checkbox"/> 20100112 <input type="checkbox"/> 20100112B <input type="checkbox"/> 20100112C
Spare clear safety glass	20101412
4-leaf barndoor	<input checked="" type="checkbox"/> 20100492 <input type="checkbox"/> 20100492B <input type="checkbox"/> 20100492C
Safety bond	20101300

Photometric data

Horizontal	P2/7									
Beam dia.	4.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	m
lux	4875	2167	1219	750	542	398	305	241	195	
Distance	2	3	4	5	6	7	8	9	10	m

Vertical										
Beam dia.	4.4	6.5	8.7	10.9	13.1	15.3	17.5	19.6	21.8	m
lux	5125	2278	1281	820	569	418	320	253	205	
Distance	2	3	4	5	6	7	8	9	10	m

LUCI DELLA RIBALTA PROFESSIONAL LIGHTING PRODUCTS

inno[®] S1000 PO


625W - 1250W

pole-operated symmetric floodlight

part number: 12806060 12806061 12806062



CE

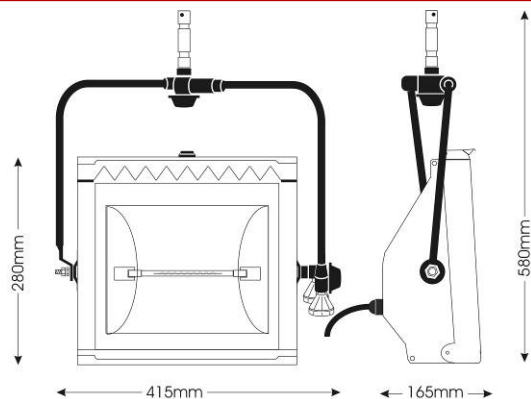

Symmetric 1Kw floodlight featuring a pole-operated stirrup for the control of pan and tilt. Ideal for applications even in larger venues where a wide, even wash of light for general lighting purposes is needed.

Each unit has a hinged front access door and a double-microswitch interlock for safe lamp replacement.

A colour frame, safety glass and 1.5m mains cable is also included for each unit.

LDR
luci della ribalta

Luci della Ribalta srl
Via Berna 14
46042 Castel Goffredo (MN), Italy
tel: +39 0376 771777
fax: +39 0376 772140
www.ldr.it info@ldr.it

Issue: ap ©2014. LDR reserves the right to alter the specification without prior notice.