

## Application

Beam style	symmetric flood
Suitable for	architectural, display and retail areas
Specification level	professional range
Typical throw distance	2 - 5m

## Electrical specifications

Supply Volts	230/240V AC single phase 50/60 Hz
Max. Lamp Watts	70W
Lamp base	Rx7s
Auto-disconnect	no
Cable/connection	1.5m, 3 x 1.5mm <sup>2</sup> flexible cable to bare ends
PSU	electronic power supply unit
Power factor correction	0,95
Standards Compliance	EN60598-2-17, CE marked

## Mechanical specifications

Paint/Finish	black/silver/white epoxy powder paint
Lamp House Construction	1-compartment, moulded steel-sheet
Reflector	symmetrical, 99% pure aluminium
Mounting & suspension	steel stirrup with 12mm centre hole and DIN mounting holes
Weight/Packed weight	3,8kg / 5,5kg
Overall dimensions	340mm (w) x105mm (d) x max 275mm(h)
Packed volume	0,069m <sup>3</sup>
Filter cut size	244 x 195mm
Accessory runners	3 slots
Safety glass	included
Colour frame	metal, 244 x 195mm supplied
Lamp access	front access

## Operational specifications

Positional adjustment	tilt lock on one side
-----------------------	-----------------------

## Lamp types

70W	CDM-TD 70/830 Rx7S 3000K 15.000 hrs
70W	CDM-TD 70/942 Rx7S 4200K 15.000 hrs

## LDR recommends Philips lamps

## Accessories

Spare metal colour frame	■ 20100121 □ 20100121B ■ 20100121C
Safety guard	20100220
Spare clear safety glass	20101420
4-leaf barndoor	■ 20100420 □ 20100420B ■ 20100420C □■ 20100420D ■■ 20100420E
Hook clamp	20100900
Safety bond	20101300
Electrical adapter	see separate literature
Mechanical track adapter	see separate literature

## Photometric data

### CDM-TD 70

#### Horizontal

Beam dia.	3,2	4,9	6,5	8,1	9,7	11,3	13	14,6	m
lux	450	200	113	72	50	37	29	23	
Distance	2	3	4	5	6	7	8	9	m

#### Vertical

Beam dia.	1,9	2,8	3,7	4,7	5,6	6,5	7,5	8,4	m
lux	660	294	165	106	74	54	42	33	
Distance	2	3	4	5	6	7	8	9	m

# rima<sup>®</sup> S70


## 70W

### discharge symmetric floodlight

part number: ■ 10076060 □ 10076061 ■ 10076062



CE

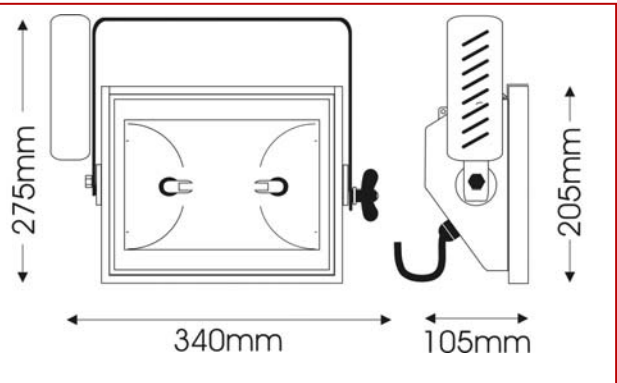

Stylish and high specification 70W symmetrical discharge floodlight, ideal for usage in all those architectural, display and retail areas applications where a powerful yet low consumption and long lasting beam of light is required.

The unit is supplied with an electronic ballast unit. A safety glass, a colour frame and 1.5m mains cable are included in standard delivery. Available to special order in any colour from the RAL range.



Distributed by  
**AMLUX s.r.l.**  
 46042 Castel Goffredo (MN)  
 info@amlux.it - www.amlux.it