

# FN LED 50 WW DMX

Luminaire: Fresnel, LED, 50W, WW  
zoom 12°-76°, 3000K, DMX control



## Type

Green line

## Family

Fresnel

## Source

LED Warm White

## Power

50W

## Control

DMX-RDM

Manuale

## Colour temperature

3000K

## Cri

>90

## Connectors

Cable without plug

## Voltage

90-260V, 50-60Hz

## Product sizes

2.5Kg

## Pack sizes

215mm x 475mm x 200mm

2.9Kg

0.02m<sup>3</sup>

## IES/LDT

Available on website

## DWG

Available on website

## User manual

Available on website

## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Adjustable forced ventilation
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing


## Functional features

- LED temperature range control to guarantee the best performances
- Constant colour temperature during the whole dimming curve
- Remote controllable functions via DMX-RDM


## Green line advantages

- No dangerous UV or IR rays for the safe lighting of the people and objects
- No radioactive or mercury-based components
- Nearly 75% saving on mains power consumption if compared to an equally-performing conventional fixture
- Reduced installation and cabling costs thanks to the In&Out chain connection system both for power mains and DMX/DALI data control
- Savings on running costs thanks to the extended lifespan of the LED source compared to the periodical replacement of conventional bulbs
- Savings on the air-con setup and supply, thanks to the lower heat emission of the fixtures
- No maintenance costs for the replacement of colour filters due to overheating and damage

## Sizes (in mm)

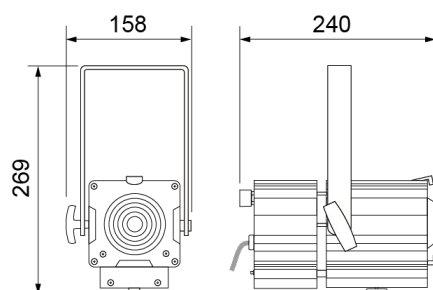

## Light output diagram



## Accessories

BASE-Q122-AS

FUNE

HC/075

MINI GAC

PL 4 MINI

TC MINI

TRK ROS-7705-B

TRK ROS-7705-N

SQUARE BASE SET

Acc: Safety net with spring hook

Acc: Half swivel coupler 75kg max

Acc: Hook clamp for 30mm tube

Acc: 4-door bamdoors

Acc: Colour frame

Acc: Mechanical track adaptor -W

Acc: Mechanical track adaptor -B