

# COM 12 PC

Luminaire: PC, halogen, 1200W  
zoom 04°-63°, GX9.5



## Type

Conventional line

## Family

PC

## Source

Halogen

## Power

1000W 1200W

## Connectors

Cable without plug

## Lamp holder

GX9.5

## Voltage

220-240V, 50-60Hz

## Product sizes

6.8Kg

## Pack sizes

315mm x 505mm x 260mm

8.1Kg

0.041m<sup>3</sup>

## DWG

Available on website


## User manual

Available on website


## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 3-way pole operation for tilt, pan and focus
- ARC version on request, with 3-way DMX control of tilt, pan and focus

## Sizes (in mm)

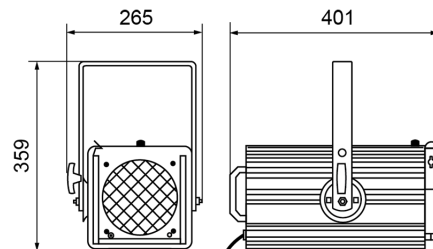

## Light output diagram



## Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

CP 70

Lamp: halogen 1000W 230V 3200K GX9.5

CP 90

Lamp: halogen 1200W 230V 3200K GX9.5

DOU-00001513

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 7.5kg max

PL 4 U12

Acc: 4-door bamdoors

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt

RS12

Acc: Safety net

T 19

Lamp: halogen 1000W 230V 3050K GX9.5

T 29

Lamp: halogen 1200W 230V 3050K GX9.5

TC S12

Acc: Colour frame

## LED equivalents

PC LED 200 WW UD

Luminaire: PC, LED, 200W, WW

PC LED 200 CW UD

Luminaire: PC, LED, 200W, CW

PC LED 200 NW UD

Luminaire: PC, LED, 200W, NW

PC LED 250 RGBW DMX

Luminaire: PC, LED, 250W, RGBW

PC LED 250 TW DMX

Luminaire: PC, LED, 250W, WW

PC LED 250 WW DMX

Luminaire: PC, LED, 250W, WW

PC LED 250 CW DMX

Luminaire: PC, LED, 250W, CW