

Luminaire: Pinspot, LED, 40W for AR-111/G53-12V lamps, DMX control



Type
Green line

Family
Pinspot

Source
LED Warm White

Power
40W

Control
DMX-RDM

Colour temperature
3000K

Connectors
Cable without plug

Voltage
90-260V, 50-60Hz

DWG
Available on website

User manual
Available on website

Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Yoke with clutch-locking system
- Easy access to the lamphouse for fast maintenance


Functional features

- LED temperature range control to guarantee the best performances
- Constant colour temperature during the whole dimming curve
- Zero to Full dimming with pre-loaded dimming curves
- Remote controllable functions via DMX-RDM
- 8/16 bit control mode on all channels


Green line advantages

- No dangerous UV or IR rays for the safe lighting of the people and objects
- No radioactive or mercury-based components
- Nearly 75% saving on mains power consumption if compared to an equally-performing conventional fixture
- Reduced installation and cabling costs thanks to the In&Out chain connection system both for power mains and DMX/DALI data control
- Savings on running costs thanks to the extended lifespan of the LED source compared to the periodical replacement of conventional bulbs
- Savings on the air-con set up and supply, thanks to the lower heat emission of the fixtures
- No maintenance costs for the replacement of colour filters due to overheating and damage
- Compatibility with existent dimmer lines network

Sizes (in mm)

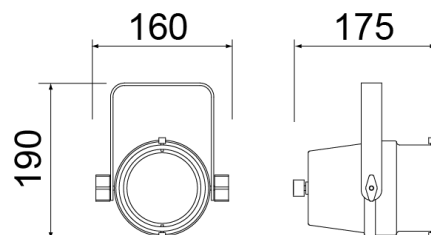

Light output diagram

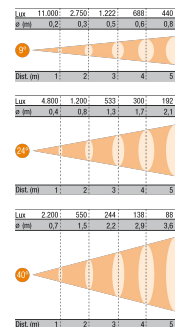

Accessories

BASE-Q122-AS
ESD111 H 100/24
FUNE
GAC
HASP/35
HASP/75-24
HASP/75-40
HASP/75-6
HC/075
LED SPOT R111 50/1
LED SPOT R111 50/2
LED SPOT R111 75/1
LED SPOT R111 75/2
LED SPOT R111 75/3
PL 4 LUT
SORAA-01041
TCL

SQUARE BASE SET
Lamp: halogen 100W 230V 2900K GZ 10 24°
Acc: Safety net with spring hook
Acc: Hook clamp for 40/50mm tube
Lamp: halogen 35W 6V 3000K G5.3
Lamp: halogen 75W 12V 3000K G5.3 24°
Lamp: halogen 75W 12V 3000K G5.3 40°
Lamp: halogen 75W 12V 3000K G5.3 6°
Acc: Half swivel coupler 75kg max
Lamp: LED 11-50W 2700K 90 AR111 8°
Lamp: LED 11-50W 3000K 90 AR111 8°
Lamp: LED 15-75W 2700K 90 AR111 24°
Lamp: LED 15-75W 3000K 90 AR111 24°
Lamp: LED 15-75W 4000K 90 AR111 24°
Acc: 4-door bamdoors
Lamp: LED SORAA 18.5W 3000K 95 AR111 9°
Acc: Colour frame