

PR LED 200 ZS WW UD



Luminaire: Profile, LED, 200W, WW
zoom 11°-23°, 3000K, Universal Dimming control



Type

Green line

Family

Profile

Source

LED Warm White

Power

200W

Control

DMX

Colour temperature

3000K

Cri

>90

Connectors

Powercon@ In&Out

Voltage

100-240V, 50-60Hz

Product sizes

12.7Kg

Pack sizes

365mm x 825mm x 350mm

14.5Kg

0.105m³

DWG

Available on website

User manual

Available on website

Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Adjustable forced ventilation
- Filter frame lockable top cover
- Gobo-holder slot
- Soft and smooth lens focusing adjustment
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm


Functional features

- LED temperature range control to guarantee the best performances
- Constant colour temperature during the whole dimming curve
- Silent mode function
- Zero to Full dimming with pre-loaded dimming curves
- Flicker-free mode with adjustable PWM LED frequency for best use with cameras
- Strobe function with adjustable frequency
- Master/Slave mode
- Remote controllable functions via DMX-RDM
- 8/16 bit control mode on all channels
- Cooling system with high performance heat pipes

Green line advantages


- No dangerous UV or IR rays for the safe lighting of the people and objects
- No radioactive or mercury-based components
- Nearly 75% saving on mains power consumption if compared to an equally-performing conventional fixture
- Reduced installation and cabling costs thanks to the In&Out chain connection system both for power mains and DMX/DALI data control
- Savings on running costs thanks to the extended lifespan of the LED source compared to the periodical replacement of conventional bulbs
- Savings on the air-con set up and supply, thanks to the lower heat emission of the fixtures
- No maintenance costs for the replacement of colour filters due to overheating and damage

Sizes (in mm)

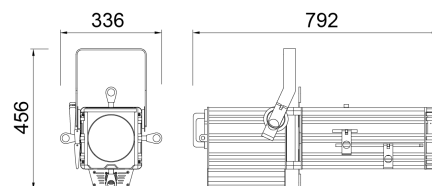


Light output diagram

Lux	14.300	3.575	1.589	894	572
∅ (m)	0,4	0,8	1,2	1,5	1,9



Dist. (m)	2	4	6	8	10
-----------	---	---	---	---	----

Lux	8.800	2.200	978	550	352
∅ (m)	0,8	1,6	2,4	3,3	4,1



Dist. (m)	2	4	6	8	10
-----------	---	---	---	---	----

Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

DIA 10

Acc: Iris diaphragm

DIA 10 BO

Acc: Iris diaphragm with blackout

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PGB R 130

Acc: B size adjustable gobo-holder

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt


SPOTLIGHT
professional lighting for the performing arts