

# PR LED 250ZS WW DMX

Luminaire: Profile, LED, 250W, WW  
zoom 10°-22°, 3200K, DMX control



## Type

Green line

## Family

Profile

## Source

LED Warm White

## Power

250W

## Control

DMX-RDM

## Colour temperature

3200K

## Cri

> 95

## Connectors

Powercon® In&Out

## Voltage

90-260V, 50-60Hz

## Product sizes

14Kg

## Pack sizes

365mm x 825mm x 350mm

0.105m<sup>3</sup>

## Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Adjustable forced ventilation
- Filter frame lockable top cover
- Gobo-holder slot
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- PO version on request, with 2-way pole operation for tilt and pan
- ARC version on request, with 3-way DMX control of tilt, pan and iris diaphragm


## Functional features

- LED temperature range control to guarantee the best performances
- Constant colour temperature during the whole dimming curve
- Silent mode function
- Zero to Full dimming with pre-loaded dimming curves
- Flicker-free mode with adjustable PWM LED frequency for best use with cameras
- Strobe function with adjustable frequency
- Master/Slave mode
- Remote controllable functions via DMX-RDM
- 8/16 bit control mode on all channels
- Cooling system with high performance heat pipes

## Green line advantages

- No dangerous UV or IR rays for the safe lighting of the people and objects
- No radioactive or mercury-based components
- Nearly 75% saving on mains power consumption if compared to an equally-performing conventional fixture
- Reduced installation and cabling costs thanks to the In&Out chain connection system both for power mains and DMX/DALI data control
- Savings on running costs thanks to the extended lifespan of the LED source compared to the periodical replacement of conventional bulbs
- Savings on the air-con setup and supply, thanks to the lower heat emission of the fixtures
- No maintenance costs for the replacement of colour filters due to overheating and damage

## Sizes (in mm)

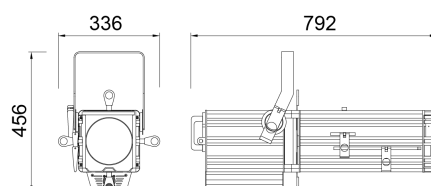

## Accessories

|             |                                    |
|-------------|------------------------------------|
| ARC STAGE/2 | Yoke: 2-way DMX motorized          |
| ARC STAGE/3 | Yoke: 3-way DMX motorized          |
| DIA 10      | Acc: Iris diaphragm                |
| DIA 10 BO   | Acc: Iris diaphragm with blackout  |
| FUNE        | Acc: Safety net with spring hook   |
| GAC         | Acc: Hook clamp for 40/50mm tube   |
| HC/075      | Acc: Half swivel coupler 75kg max  |
| PGB R 130   | Acc: B size adjustable gobo-holder |
| PO/2 SP12   | Yoke: Pole Operated for Pan-Tilt   |
| TC S12      | Acc: Colour frame                  |

  
**SPOTLIGHT**  
professional lighting for the performing arts