

COM 25 PC



Luminaire: PC, halogen, 2500W
zoom 04°-66°, G22

Type

Conventional line

Family

PC

Source

Halogen

Power

2000W 2500W

Connectors

Cable without plug

Lamp holder

G22

Voltage

220-240V, 50-60Hz

Product sizes

13.7Kg

Pack sizes

385mm x 659mm x 341mm

15.7Kg

0.087m³

DWG

Available on website


User manual

Available on website


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- Adjustable lampholder position for proper LCL settings
- 99,99% polished and treated aluminum reflector
- PO version on request, with 3-way pole operation for tilt, pan and focus
- ARC version on request, with 3-way DMX control of tilt, pan and focus

Sizes (in mm)

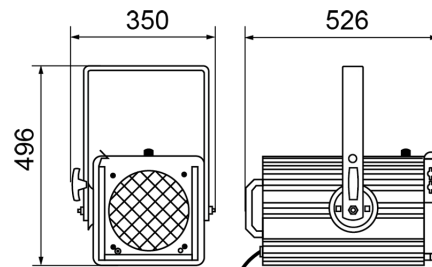

Light output diagram



Accessories

ARC STAGE/2 +

Yoke: 2-way DMX motorized

ARC STAGE/3 +

Yoke: 3-way DMX motorized

CP 91

Lamp: halogen 2500W 230V 3200K G22

CP 92

Lamp: halogen 2000W 230V 3200K G22

DOU-00001513

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 7.5kg max

PL 4 U25

Acc: 4-door bamdoors

PO/2 SP25

Yoke: Pole Operated for Pan-Tilt

PO/3 SP25

Yoke: Pole Operated for Pan-Tilt-Focus

RS25

Acc: Safety net

TC S25

Acc: Colour frame

LED equivalents

PC LED 450 RGBW DMX

Luminaire: PC, LED, 450W, RGBW

PC LED 450 TW DMX

Luminaire: PC, LED, 450W, WW

PC LED 450 CW DMX

Luminaire: PC, LED, 450W, CW

PC LED 450 WW DMX

Luminaire: PC, LED, 450W, WW