

# FI 12 ZS

## Luminaire: Profile, halogen, 1200W zoom 13°-35°, GX9.5



Type  
Conventional line

Family  
Profile

Source  
1  
1

Power  
1000W 1200W

Connectors

Lamp holder

Voltage

Product sizes  
9.8Kg

Pack sizes  
332mm x 332mm x 787mm


11.5Kg  
0.087m<sup>3</sup>

DWG  
Available on website


User manual  
Available on website

### Technical features

#### Sizes (in mm)

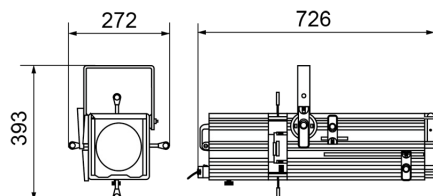

#### Light output diagram



#### Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

CP 70

Lamp: halogen 1000W 230V 3200K GX9.5

CP 90

Lamp: halogen 1200W 230V 3200K GX9.5

DOU-00001513

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PL 4 U12

Acc: 4-door bamdoors

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt

RS12

Acc: Safety net

T 19

Lamp: halogen 1000W 230V 3050K GX9.5

T 29

Lamp: halogen 1200W 230V 3050K GX9.5

TC S12

Acc: Colour frame

#### LED equivalents

PR LED 200 ZS WW UD

Luminaire: Profile, LED, 200W, WW

PR LED 250Z S RGBWDMX

Luminaire: Profile, LED, 250W, RGBW

PR LED 250Z S TW DMX

Luminaire: Profile, LED, 250W, TW

PR LED 250Z S WW DMX

Luminaire: Profile, LED, 250W, WW

PR LED 250Z S CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 250Z N RGBWDMX

Luminaire: Profile, LED, 250W, RGBW

PR LED 250Z N TW DMX

Luminaire: Profile, LED, 250W, TW

PR LED 250Z N CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 200 ZS NW UD

Luminaire: Profile, LED, 200W, NW

PR LED 200 ZS CW UD

Luminaire: Profile, LED, 200W, CW

PR LED 250Z N WW DMX

Luminaire: Profile, LED, 250W, WW