

# FI 12 ZW

Luminaire: Profile, halogen, 1200W  
zoom 24°-50°, GX9.5



## Type

Conventional line

## Family

Profile

## Source

1

1

## Power

1000W 1200W

## Connectors

## Lamp holder

## Voltage

## Product sizes

9.1Kg

## Pack sizes

332mm x 332mm x 787mm

10.7Kg

0.087m<sup>3</sup>

## DWG


Available on website

## User manual

Available on website


## Technical features

### Sizes (in mm)

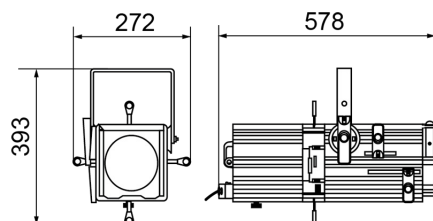


### Light output diagram

Lux	9,233	2,308	1,026	577	369
ø (m)	1,7	3,4	5,1	6,8	8,5



Dist. (m)	4	8	12	16	20
-----------	---	---	----	----	----

Lux	2,835	709	315	177	113
ø (m)	3,7	7,5	11,2	14,9	18,7

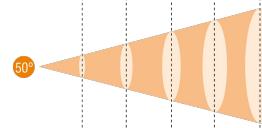

Dist. (m)	4	8	12	16	20
-----------	---	---	----	----	----

### Accessories

ARC STAGE/2

Yoke: 2-way DMX motorized

ARC STAGE/3

Yoke: 3-way DMX motorized

CP 70

Lamp: halogen 1000W 230V 3200K GX9.5

CP 90

Lamp: halogen 1200W 230V 3200K GX9.5

DOU-00001513

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

PL 4 U12

Acc: 4-door bamdoors

PO/2 SP12

Yoke: Pole Operated for Pan-Tilt

RS12

Acc: Safety net

T 19

Lamp: halogen 1000W 230V 3050K GX9.5

T 29

Lamp: halogen 1200W 230V 3050K GX9.5

TC S12

Acc: Colour frame

### LEDequivalents

PR LED 200 ZW WW UD

Luminaire: Profile, LED, 200W, WW

PR LED 250Z W CW DMX

Luminaire: Profile, LED, 250W, CW

PR LED 250Z W WW DMX

Luminaire: Profile, LED, 250W, WW

PR LED 250Z W RGBWDMX

Luminaire: Profile, LED, 250W, RGBW

PR LED 200 ZW CW UD

Luminaire: Profile, LED, 200W, CW

PR LED 250Z W TW DMX

Luminaire: Profile, LED, 300W, TW

PR LED 200 ZW NW UD

Luminaire: Profile, LED, 200W, NW