



# Actinic BL TL(-K)/TL-D(-K)

## Actinic BL TL-D 15W/10 1SL/25

Tubular low-pressure mercury vapour fluorescent lamps

### Product data

General Information	
Cap base	G13 [ Medium Bi-Pin Fluorescent]
Main application	Reprography (R)
Life to 50% failures (nom.)	8000 h
Useful life (nom.)	5000 h

Light Technical	
Colour code	10
Colour designation	Actinic
Chromaticity coordinate X (nom.)	222
Chromaticity coordinate Y (nom.)	210
Depreciation at 500 Hours	10 %
Depreciation at 500 Hours	15 %
Depreciation at 500 Hours	20 %

Operating and Electrical	
Power (Rated) (Nom)	15 W
Lamp current (nom.)	0.34 A
Voltage (Nom)	51 V

Approval and Application	
Mercury (Hg) content (nom.)	5.0 mg

UV	
UV-B/UV-A (IEC)	0.2 %
UV-A radiation 100 hours (IEC)	3.5 W


Product Data	
Full product code	871150071093240
Order product name	Actinic BL TL-D 15W/10 1SL/25
EAN/UPC – product	8711500710932
Order code	71093240
Local Code	TLD1510
Numerator – quantity per pack	1
Numerator – packs per outer box	25
Material no. (12NC)	928024801029
Net weight (piece)	56.570 g

# Actinic BL TL(-K)/TL-D(-K)

## Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


## Dimensional drawing




Product	D (max)	A (max)	B (max)	B (min)	C (max)
Actinic BL TL-D 15W/10	28 mm	437.4 mm	444.5 mm	442.1 mm	451.6 mm
1SL/25					

### TL-D 15W/10

## Photometric data

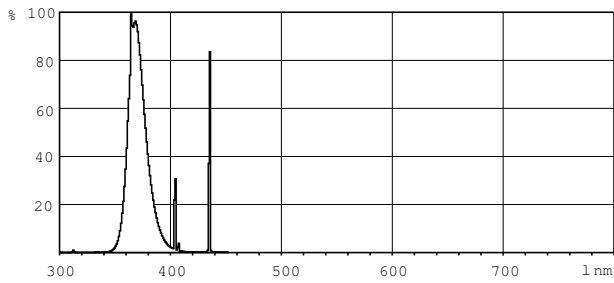

### Lightcolour /10

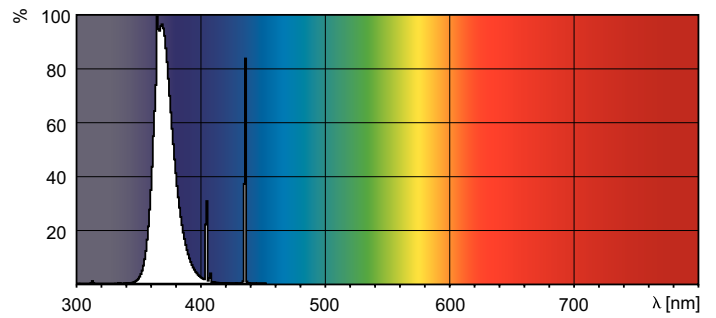

### Lightcolour /10

