


A15


15-inch, 2-way
Active Loudspeaker

- Amp Power: 1200W Peak; 350W Class D (LF) + 50W Class AB (HF) RMS
- Built-in Digital Signal Processing (DSP) with LCD screen, EQ & multiple presets
- Frequency Range: 45hz-20kHz
- Nominal Coverage: 90° x 60°
- Output (Peak SPL @ 1M): 124dB
- Drivers: 15-inch woofer with 2.5-inch voice coil + 1.35-inch HF Compression Driver
- Inputs: Balanced Female XLR ¼-inch combo jack, 2x RCA (phono)
- Output: Balanced Male XLR
- Enclosures: H-PP Molded
- Grill: 1.2mm Steel
- Handles: 1 on top / 1 on side
- Fly Points: 2 on top / 1 on back
- Pole Mounting: Dual position 0-degrees or 7.5-degrees
- Power Input: 115V/230V, 50/60Hz (country specific)
- Power Consumption: 400W
- Dimensions: 28.7"x16.7"x16.3" / 728x425x414mm
- Weight: 42 lbs. / 19.1 kg.

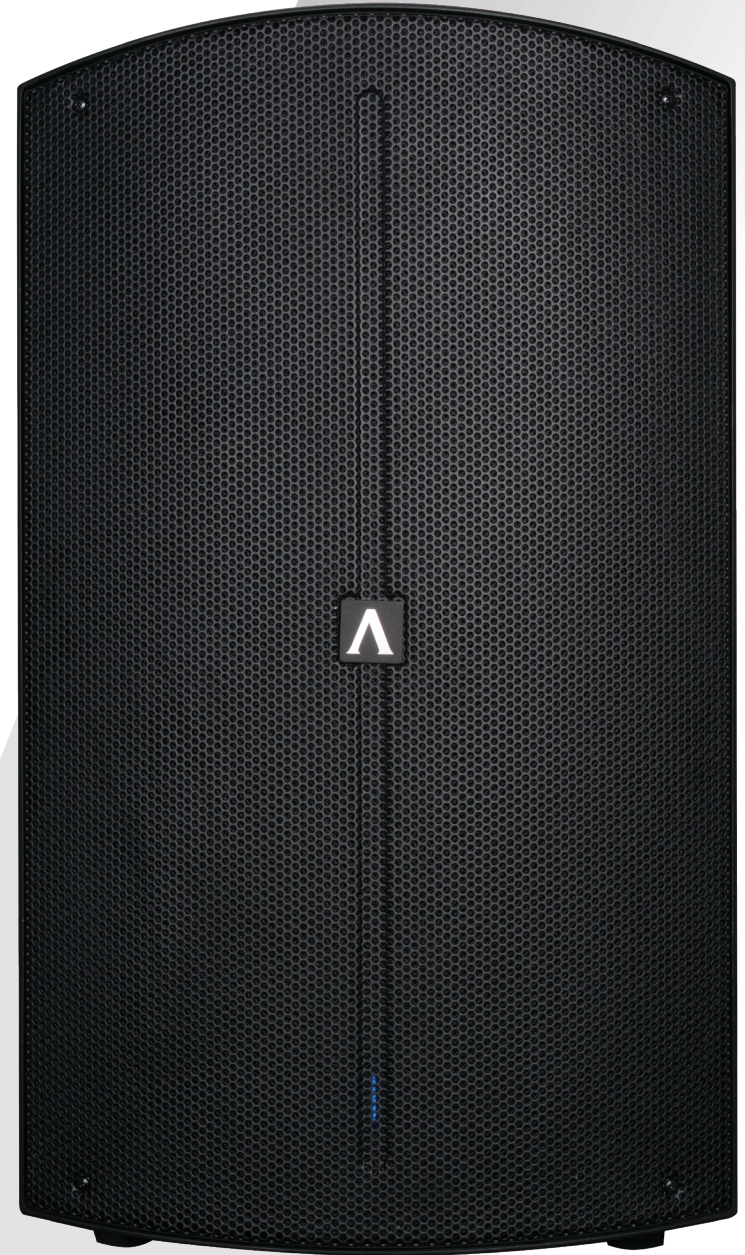

A15 - DSP INFORMATION

1. MODE:	A. Normal	B. Live	C. Club	D. Speech
2. LOCATION:	A. Pole	B. Monitor	C. Bracket	
3. TREBLE:	-10dB ~ +10dB			
4. BASS:	-10dB ~ +10dB			
5. LED:	A. Off	B. On	C. Limit	
6. RESET:	A. Yes	B. No		
7. INFO				

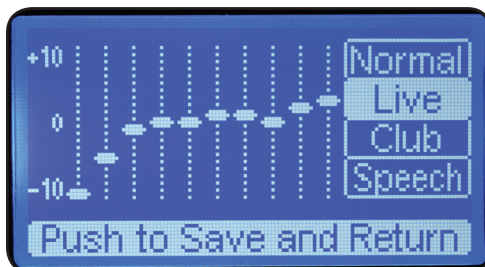

Digital Signal Processing (DSP)
With LCD screen, EQ
& Multiple Presets

Inputs:
Balanced Female XLR
¼-inch Combo Jack,
RCA (phono),
Mini AUX Jack

Output:
Balanced Male XLR

Power Switch

DSP Control Knob

Channel 1
Line Input Gain

Channel 2
Line Input Gain

IEC Power Input:
110-120V, 50/60Hz
or 220-240V, 50/60Hz
(country specific)

