



DT 34/4

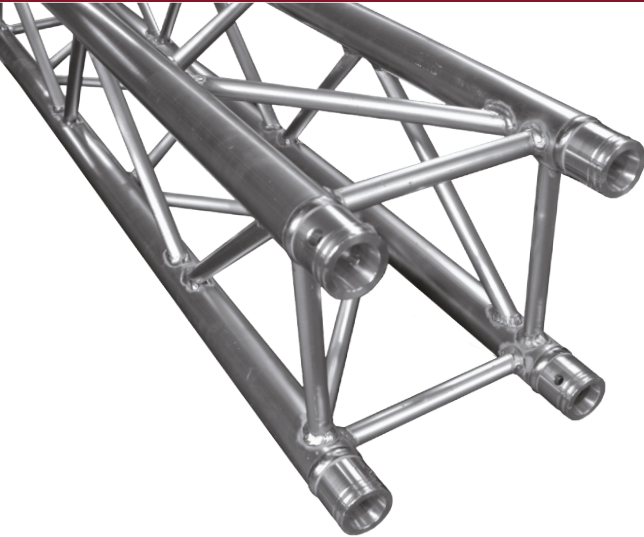

∅ 50mm

DT 34/4-050

Code: 1724100037 **L** 500mm **KG** 5,9

DT 34/4-100

Code: 1724100038 **L** 1000mm **KG** 8,2

DT 34/4-150

Code: 1724100039 **L** 1500mm **KG** 14,1

DT 34/4-200

Code: 1724100040 **L** 2000mm **KG** 4,5

DT 34/4-250

Code: 1724100041 **L** 2500mm **KG** 5,5

DT 34/4-300

Code: 1724100042 **L** 3000mm **KG** 6,5

DT 34/4-350

Code: 1724100050 **L** 3500mm **KG** 7,5

DT 34/4-400

Code: 1724100048 **L** 4000mm **KG** 8,4

Compatible to DT 34 | DT 34/2 | DT 34/3

The difference in the DT 34/X series is the pipe wall thickness and the resulting load.

DT34/4 Tube diameter: 50mmx4mm (2 x 0.16 inch)



LOAD CHART - EN-1090 - EUROCODE

Length (m)	2 m	3 m	4 m	5 m	6 m	8 m	10 m	12 m
Point load (kg)	4255	3663	2838	2286	1893	1399	1097	892
Deflection (mm)	3,1	8,9	16,4	25,9	37,2	66,1	103,1	148,2
Distrib. load (kg/m)	2128	1414	1058	844	631	350	219	149
Deflection (mm)	1,9	6,4	15,3	29,8	46,4	82,1	127,6	182,7

TECHNICAL DATA

Tube diameter: 50mmx4mm (2 x 0.16 inch)
 Cross brace diameter: 20mmx2mm (0.8 x 0.08 inch)
 Material: Alloy EN-AW 6082 T6 (AlMgSi1 T6)



LOAD CHART - EN-1090 - Eurocode

