

Product datasheet

Table lamp, Lacertae USB, dark gray, 5V DC, 5,00 W, warmwhite



Technical Data

General Characteristics

| | |
|----------------------|-------------------------------------|
| Material | aluminum die casting |
| Colour | dark gray |
| Optics | |
| included in delivery | incl. lithium battery 3,7V, 7800mAh |

Electrical Characteristics

| | |
|-----------------------------|-----------------------------|
| Power / power consumption | 5,00 W / 5,00 W |
| Input Voltage | 5V DC |
| Input current | |
| Base (standard designation) | |
| Number of Bases | |
| Power supply unit | excl. LED-power supply unit |
| Electronically reversible | dimmable |
| Connection possibility | USB |
| Protection class I, II, III | III |

Light Technical Data

| | |
|-----------------------------|------------------|
| Bulb | LED-module fixed |
| Colour Designation | warmwhite |
| Colour temperature | 3000 K |
| Luminous flux | 460 lm |
| Beam angle | 120° |
| LED type | SMD |
| LED quantity | 36 |
| Spectral power distribution | |




Table lamp, Lacertae USB, dark gray, 5V DC, 5,00 W, warmwhite

Light Direction

| | |
|----------------------------|-------------|
| Rotating and tilting range | fixed |
| Angle of inclination | |
| Radiation direction | |
| Reflector / lense | symmetrisch |

Dimensions & Weight

| | |
|----------------|--------|
| Length | 180 mm |
| Width | 180 mm |
| Height | 267 mm |
| Diameter | |
| Product Weight | 500 g |

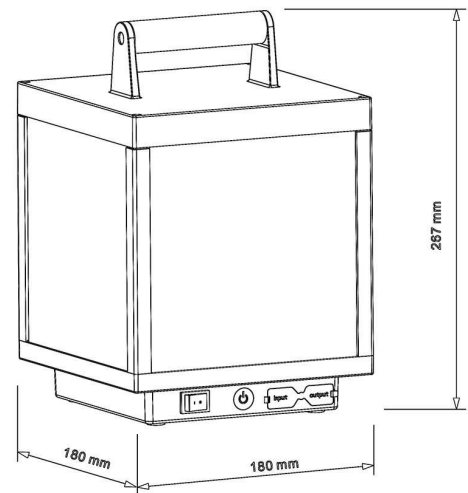

Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

| | |
|---------------------|---------------|
| Working temperature | -10°C - +45°C |
| Storage temperature | -10°C - +45°C |
| IP - Code | IP54 |

Table lamp, Lacertae USB, dark gray, 5V DC, 5,00 W, warmwhite




General product data

Environmental Characteristics

| | |
|--------------------|--|
| Energy label | |
| Energy consumption | |

Lifespan

| | |
|---------------------------------|--|
| Lamp life time | |
| Luminous flux (end of lifetime) | |
| Number of switching cycles | |

| | |
|---|--|
| IP54 | Protection against penetration of dust. (dust protected) Protection against penetration of splashing water. |
|  | Lightings of Protection Class III Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated. |
|  | Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED. |
|  | The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person |