

COSMOBEAM 800W / 1000W



Versions:

- RC 80P - Cosmobeam 800W orange with clamp and flexible arm
- RC 100P - Cosmobeam 1000W orange with clamp and flexible arm
- RC 80PB - Cosmobeam 800W black with clamp and flexible arm
- RC 100PB - Cosmobeam 1000W black with clamp and flexible arm

Cosmobeam 800W / 1000W is an open-face, tungsten-halogen floodlight which is a precious tool for both studio applications and locations where powerful and long distance illumination, quick and easy setup are needed.


MAIN FEATURES

- Very strong and lightweight aluminium housing
- Special design and treatments of the reflector for an extremely powerful and bright light output to deliver an exceptional even illumination
- Smooth and accurate focusing mechanism for beam variation to ensure precise light delivery
- 100% pure silver lamp contacts unique feature to extend lamp and contacts-life and reduce maintenance costs
- Top quality switch with a very high number of on/off cycles
- All main mechanical components are stainless steel
- The ergonomic knob to fix the tilt position is shaped to ensure ideal handling to quickly and effortlessly fix the tilt position
- Complete set essories available to create effects and control the light
- Designed and manufactured in Italy



TECHNICAL FEATURES

- High temperature coating
- Sanded and treated aluminium reflector
- Spot/Flood focusing via a rear knob
- Clamp and flexible arm mounting
- 100% pure silver lamp contacts
- 3.5 m VDE fire resistant silicone cable, 3x1.5 mmq section
- Im-line 10 A switch protected by high-impact-proof housing
- Cable gland against tear
- Supply voltage 230 - 240 V
- Lamp base R7s
- Colour temperature: 3200K
- IP 20
- CE compliant
- Weight: 1,5 Kg
- Dimensions: 185 x 311 mm

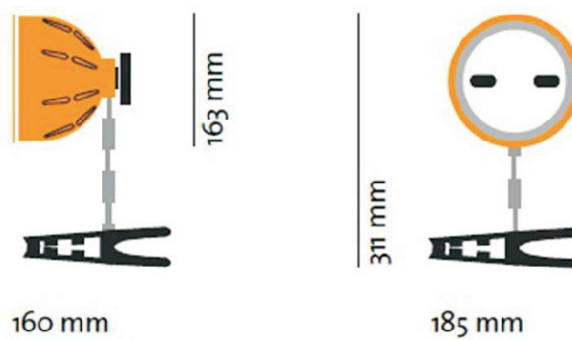

COLOUR TEMP. (K)

3200

TUNGSTEN

FLOOD

LAMP (W)

800
1000

HALOGEN

VOLTAGE (V)

230
240

AVAILABLE

RC 80

PHOTOMETRICS:

Spot (50°)

Distance (m)	3	5	7
Lux	5750	2150	1300
Beam Ø (m)	2.8	4.7	6.5


Flood (90°)

Distance (m)	3	5	7
Lux	1450	580	300
Beam Ø (m)	5	10	14

Performance based on DXX P2/13 800 W 230 V

LAMPS (not included):

BASE R7s - 3200K



WATT: 800 - 230 V
ANSI: DXX
LIF: P2/13

64571 Osram 800W 230V R7s P2/13 DXX 74,90mm 3200°K 75h
36953 GE 800W 240V R7S P2/13 DXX 78mm 3200K 75h
13162R Philips 800W 230V R7s 78mm P2/13 DXX 3200°K 30h

RC 100

PHOTOMETRICS:

Spot (50°)

Distance (m)	3	5	7
Lux	6400	2900	1450
Beam Ø (m)	2.8	4.7	6.5


Flood (90°)

Distance (m)	3	5	7
Lux	1850	750	380
Beam Ø (m)	6	10	14

Performance based on DXX P2/35 1000 W 230 V

LAMPS (not included):

BASE R7s - 3200K



WATT: 1000 - 230 V o 800 - 230V
LIF: P2/35 o P2/13

Ushio 1000W 240V R7s 89,6mm P2/35 3200°K 120h (ex 13704R Philips)

64571 Osram 800W 230V R7s P2/13 DXX 74,90mm 3200°K 75h
36953 GE 800W 240V R7S P2/13 DXX 78mm 3200K 75h
13162R Philips 800W 230V R7s 78mm P2/13 DXX 3200°K 30h

ACCESSORIES



RC 103C/R
Four-leaf barndoor with safety mesh and gel filter clips 650g



RC 106
Scrim set (4 pieces) 150g



RC 211B
Aluminium stand, 3 risers, 78/240 cm, spigot 16mm, black, weight 5 Kg



RC 101
Accessory holder 350g



RC 107
Safety mesh (excludes any other accessory) 110g



RC 212B
Aluminium stand, 3 risers, 90/280 cm, spigot 16mm, black, weight 5 Kg



RC 104
Dichroic filter 170g



RC 50/55
Snoot ø 55mm 200g (with RC 101 use only)



RK-2HC
Hard case for 2 Cosmobeam heads 800W/1000W (on request also with trolley)



RC 105
Safety glass 170g



RC 50/63
Snoot ø 63mm 210g (with RC 101 use only)



RK-3HC
Hard case for 3 Cosmobeam heads 800W/1000W (on request also with trolley)



RC 105A
Diffusion glass 170g



FF3870
Safety Steel cable ø 2.5 mm - 70 cm length



RK-3S
Cordura soft bag for 3 Cosmobeam heads 800W/1000W