

COLOUR TEMP. (K)		LAMP (W)	VOLTAGE (V)
3200	FLOOD	2000	230 240
TUNGSTEN		HALOGEN	AVAILABLE

## Cosmobeam 2000 W with yoke

This 2000 W open-face, tungsten-halogen floodlight remains an unsurpassed fixture for studios and locations where high-power and long-distance illumination is required.

Suitable for any lighting requirement such as effect light, key light and fill light.




### Main Features

- Steel housing, very strong and lightweight material
- Thanks to its special design and treatments, the hammered aluminium reflector offers an extremely powerful and bright light output for an exceptional even illumination
- Smooth and accurate focusing mechanism for beam variation to ensure precise light delivery
- Silicone cable for high flexibility and to avoid fire risk
- Top quality switch with a very high number of on/off cycles
- All main mechanical components are stainless steel
- The ergonomic knob to fix the tilt position is shaped to ensure ideal handling to quickly and effortlessly fix the tilt position
- Complete set of accessories available to create effects and control the light
- Also available as a (2) head kit
- **Designed and manufactured in ITALY**

### Ordering Codes

RC 200 - Cosmobeam 2000 W with yoke

- Steel housing
- High-temperature coating
- Sanded and treated hammered aluminium reflector
- Spot/flood focusing via a rear knob
- Aluminium yoke mounting with 16 mm (5/8") socket
- 4.2 m VDE fire resistant silicone cable, 3 x 2.5 mm<sup>2</sup> section
- In-line 20 A switch protected by high-impact-proof housing
- Supply voltage 230 –240 V
- Lamp base RX7s
- Colour temperature 3200 K
- IP 20
- CE compliant
- Weight 3.3 kg
- Packing dimensions 310 mm x 320 mm x 330 mm

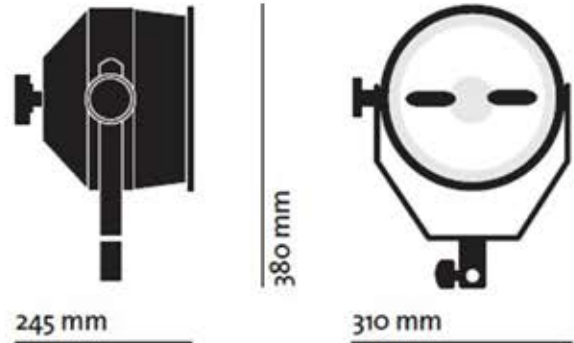

## Photometrics

### SPOT (29°)

Distance (m)	3	4	5	7	9
Lux	7800	4388	2808	1433	867
Beam Ø (m)	1.6	2.1	2.6	3.6	4.7

### FLOOD (52°)

Distance (m)	3	4	5	7	9
Lux	4010	2256	1444	737	446
Beam Ø (m)	2.9	3.9	4.9	6.8	8.8

Typical performance based on FEX P2/27 2000 W 230 V

## Lamps \*

BASE RX7s – 3200 K

CODE	WATT	ANSI	LIF
RC 200	2000-230 V	FEX	P2/27



OSR 64781 – OSRAM halogen lamp, FEX P2/27 2000 W 230 V RX7s

GE P2/27 – GE halogen lamp, FEX P2/27 2000 W 230 V RX7s

\*not included

## Accessories



**RC 202 C/R**  
Four-leaf barndoor with safety mesh & gel filter clips  
1000 g



**RC 205**  
Safety glass 510 g



**RC 212B**  
Aluminium stand, 3 risers, 90/280 cm, 16 mm spigot, black, 5 kg load



**RC 201**  
Accessory holder  
485 g



**RC 207**  
Scrim set (4 pieces) 270 g



**RK 1/200**  
Case for (1) COSMOBEAM head  
**RK 2/200**  
Hard case for (2) COSMOBEAM heads  
**RK/200/BT**  
Hard case w/trolley for (2) COSMOBEAM heads



**RC 203**  
Safety mesh (excludes any other accessory)  
150 g



**C500**  
Pelican gaffer grip



**RC 204**  
Dichroic filter 510 g



**FF3871**  
Safety Steel cable 4 mm Ø - 70 cm length

Technical specifications and data are provided for guidance only. Due to improvement in technology and/or in products, all product, specs and data are subject to change without notice. COSMOLIGHT accepts no liability for any errors, inaccuracies or incompleteness contained herein.