

Product datasheet

Article no.: 449202

Built in ceiling lamp, silver, 12V AC/DC, 1x max. 50,00 W

kapego

Technical Data

General Characteristics

Material	aluminum die casting
Colour	silver
Optics	brushed
included in delivery	



Electrical Characteristics

Power	1x max. 50,00 W
input voltage	12V AC/DC
input current	
Base (standard designation)	GU5.3 / MR16
Number of bases	1
Power supply unit	excl. transformer
Electronically reversible	dimnable via optional bulb
Connection possibility	wire with open ends
Protection class I, II, III	III



15.11.2017

Errors and technical data are subject to change without notice.

Product datasheet


Article no.: 449202

Built in ceiling lamp, silver, 12V AC/DC, 1x max. 50,00 W



Light Direction

Rotating and tilting range	swivel
Angle of inclination	30°
Radiation direction	
Reflector / lense	symmetrisch

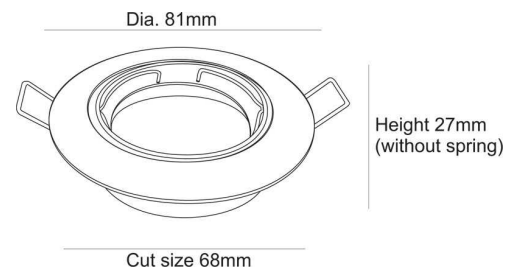

Dimensions & Weight

Length	
Width	
Height	27 mm
Diameter	81 mm
Mounting Depth	65 mm
Product Weight	163 g

Cut-out dimensions

Length	
Width	
Diameter	68 mm

Product datasheet

Article no.: 449202

Built in ceiling lamp, silver, 12V AC/DC, 1x max. 50,00 W



Absolute maximum ratings

Working temperature	-5°C - +40°C
Storage temperature	
IP - Code	IP 20

EEl The luminaire is suitable for lamps of energy efficiency classes A++ to E.

IP 20 Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class III
Luminaire in which protection against electric shock relies on supply at safety extra-low voltage (SELV) and in which voltages higher than those of SELV are not generated.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.
