

Product datasheet

Article no.: 730155

Built in wall lamp, Quid I CW, matt silver, 220-240V AC/50-60Hz, 1,80 W, coldwhite



Technical Data

General Characteristics

Material	aluminum die casting
Colour	matt silver
Optics	
included in delivery	PVC installation housing 0,3 m connection cable

Electrical Characteristics

Power / power consumption	1,80 W / 3,10 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Connection possibility	Connection box
Protection class I, II, III	I

Light Technical Data

Bulb	LED-module fixed
Colour Designation	coldwhite
Colour temperature	6000 K
Luminous flux	47 lm
Beam angle	80°
LED type	High Power
LED quantity	1
Spectral power distribution	




14.11.2017

Errors and technical data are subject to change without notice.

Product datasheet

Article no.: 730155

Built in wall lamp, Quid I CW, matt silver, 220-240V AC/50-60Hz, 1,80 W, coldwhite

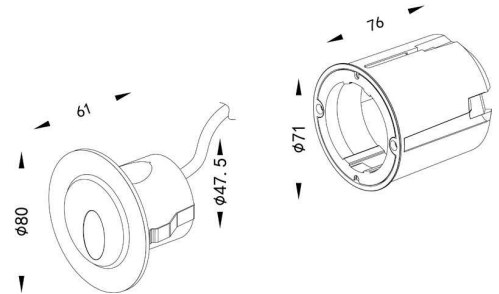

Light Direction

Rotating and tilting range	fixed
Angle of inclination	0°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	
Width	
Height	61 mm
Diameter	80 mm
Mounting Depth	76 mm
Product Weight	298 g
Bearing capacity	

Cut-out dimensions

Length	
Width	
Diameter	71 mm

Mounting Bowl

Material	pvc
Length	
Width	
Height	76 mm
Diameter	71 mm

Product datasheet

Article no.: 730155

Built in wall lamp, Quid I CW, matt silver, 220-240V AC/50-60Hz, 1,80 W, coldwhite



Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 65

General product data

Environmental Characteristics

Energy label	B
Energy consumption	4 kWh/1000h

Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

IP 65 Protection against penetration of dust. (complete dust protection) Protection against penetration of water jets.



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person