

# PHILIPS

## Lighting



# MSD Platinum (Touring/Stage)

## MSD Platinum 25 R 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

### Product data

General Information		Operating and Electrical	
Operating Position	UNIVERSAL [ Any or Universal (U)]	Power (Rated) (Nom)	550 W
Main Application	Stage/Touring	Voltage (Max)	115 V
Life to 50% Failures (Nom)	1500 h	Voltage (Min)	85 V
Light Technical		Controls and Dimming	
Color Code	2	Dimmable	Yes
Luminous Flux (Min)	22100 lm	Luminaire Design Requirements	
Luminous Flux (Nom)	24500 lm	Pinch Temperature (Max)	350 °C
Chromaticity Coordinate X (Max)	313	Product Data	
Chromaticity Coordinate X (Min)	280	Full product code	871869961403400
Chromaticity Coordinate X (Nom)	297	Order product name	MSD Platinum 25 R 1CT/8
Chromaticity Coordinate Y (Max)	316	EAN/UPC - Product	8718699614034
Chromaticity Coordinate Y (Min)	289	Order code	928495905314
Chromaticity Coordinate Y (Nom)	303	Numerator - Quantity Per Pack	1
Correlated Color Temperature (Nom)	8000 K	Numerator - Packs per outer box	8
Luminous Efficacy (rated) (Nom)	44 lm/W		


## MSD Platinum (Touring/Stage)

Material Nr. (12NC)	928495905314
Net Weight (Piece)	108.000 g

### Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


### Dimensional drawing




MSD Platinum 25 R

Product	D (max)	O	C (max)
MSD Platinum 25 R 1CT/8	54 mm	1.4 mm	60 mm

### Photometric data

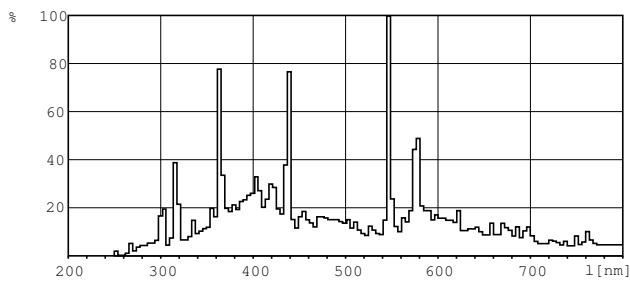

MSD

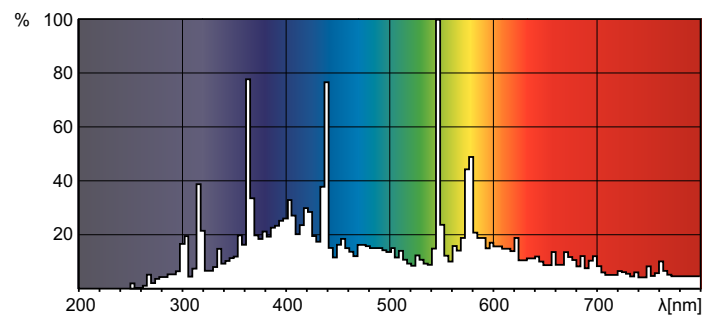

MSD

