

PHILIPS

Lighting



MSD Platinum (Touring/Stage)

MSD Platinum 200 Flex 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Product data



General Information		Controls and Dimming	
Cap-Base	- [-]	Dimmable	Yes
Operating Position	UNIVERSAL [Any or Universal (U)]		
Life to 50% Failures (Nom)	2000 h	Mechanical and Housing	
Life to 50% Failures entertainment cycle (Nom)	6000 h	Cap-Base Information	-
Light Technical		Luminaire Design Requirements	
Color Code	2	Pinch Temperature (Max)	350 °C
Luminous Flux (Nom)	12000 lm		
Chromaticity Coordinate X (Nom)	0.300	Product Data	
Chromaticity Coordinate Y (Nom)	0.305	Full product code	871869680813900
Correlated Color Temperature (Nom)	7800 K	Order product name	MSD Platinum 200 Flex 1CT/8
Operating and Electrical		EAN/UPC - Product	8718696808139
Power (Rated) (Nom)	240 W	Order code	928495705314
Voltage (Min)	55 V	Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	8
		Material Nr. (12NC)	928495705314
		Net Weight (Piece)	71.200 g

MSD Platinum (Touring/Stage)

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.


Dimensional drawing




Product	D (max)	O	C (max)	T
MSD Platinum 200 Flex 1CT/8	56.5 mm	0.8 mm	60 mm	7 mm

MSD Platinum 200 Flex

Photometric data

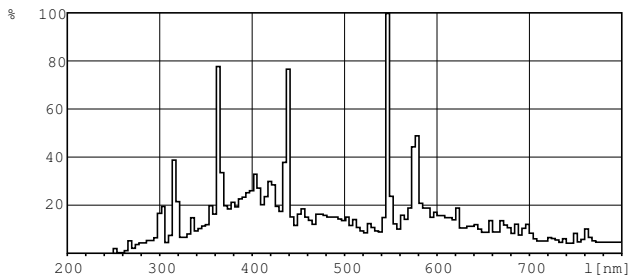

MSD

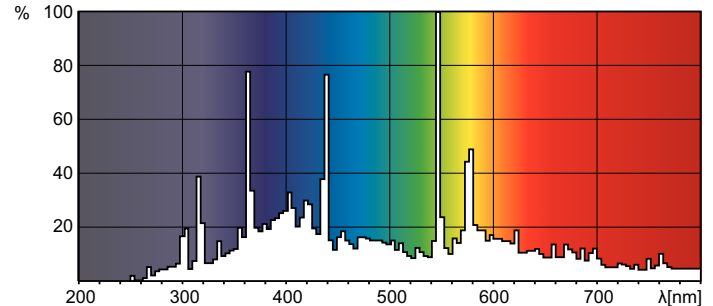

MSD

