MSD Platinum (Touring/Stage)

MSD Platinum 400L Flex 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Product data

General Information

Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Stage/Touring
Life to 50% Failures (Nom)	1500 h
Life to 50% Failures entertainment cycle (Nom)	4000 h

Light Technical

Color Code	2
Luminous Flux (Min)	22100 lm
Luminous Flux (Nom)	24500 lm
Chromaticity Coordinate X (Max)	313
Chromaticity Coordinate X (Min)	280
Chromaticity Coordinate X (Nom)	297
Chromaticity Coordinate Y (Max)	316
Chromaticity Coordinate Y (Min)	289
Chromaticity Coordinate Y (Nom)	303
Correlated Color Temperature (Nom)	8000 K

Luminous Efficacy (rated) (Nom)	52 lm/W

Operating and Electrical

Power (Rated) (Nom)	470 W
Voltage (Max)	110 V
Voltage (Min)	85 V

Controls and Dimming

Dimmable	Yes

Luminaire Design Requirements

Pinch Temperature (Max)	350 ℃

Product Data

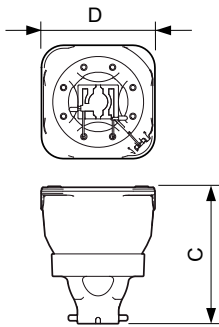|	
Full product code	871869965196100
Order product name	MSD Platinum 400L Flex 1CT/8
EAN/UPC – Product	8718699651961
Order code	928496405314

MSD Platinum (Touring/Stage)

Numerator – Quantity Per Pack	1
Numerator – Packs per outer box	8
Material Nr. (12NC)	928496405314

Net Weight (Piece)	108.000 g

Warnings and Safety

· A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.
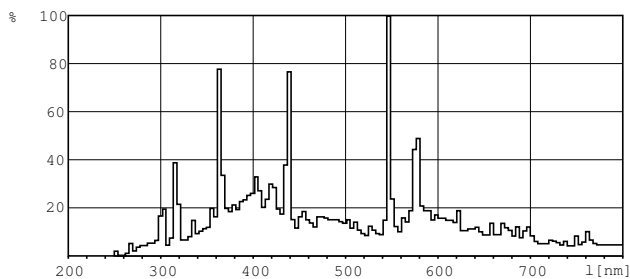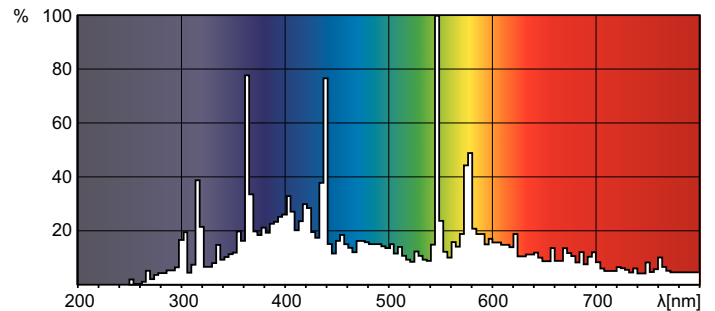
Dimensional drawing

MSD Platinum 400L Flex

Product	D (max)	O	C (max)
MSD Platinum 400L Flex 1CT/8	54 mm	1.2 mm	60 mm

Photometric data

MSD

MSD