

Article No.: 872127

Power supply unit, MINI, CV, 12V/4W












IP65 CE

Electrical Characteristics

Operating mode	constant voltage	Input voltage	220-240V AC/50-60Hz
Power	4,00 W	Power factor	0,55
Output voltage	12V DC	Connection possibility	wire with open ends
Output current	0-330 mA		

Product features


	Protection class II		Overvoltage protection
SELV	Low voltage protection		Lamp control gear 110
	Short circuit protection		Suitable for furniture installation
	Overload protection	ErP	Standby-power consumption < 0,5 W
	Overheating protection	LVD	Safety according to EN 61347
	Safety transformer	EMC	Interference suppression + immunity according to EN 55015 + EN 61547
	not dimmable	EMC	Mains harmonics + flicker according to EN 61000-3-2 + EN 61000-3-3

Black fields are applicable / gray fields are not applicable

Product datasheet

Article No.: 872127

Power supply unit, MINI, CV, 12V/4W

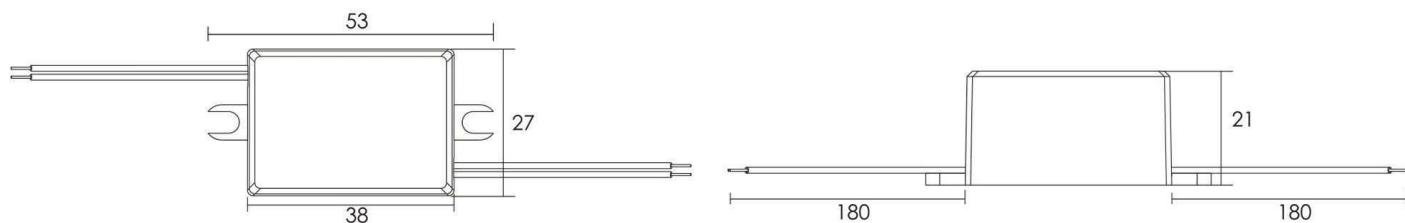

Dimensions & Weight

Length	53,00 mm
Width	27,00 mm
Height	21,00 mm
Diameter	0,00 mm
Product weight	45 g

Absolute maximum ratings

Operating temperature	-20°C - +50°C
Case temperature	80 °C
max. amount of circuit breakers	B10A=17, B16A=28, C10A=37, C16A=59
max. inrush current	5A/260µs
capacitive load	