

Product datasheet

Article no.: 920115

Surface mounted furniture lamp, Unterbauleuchte LED, white, 220-240V AC/50-60Hz, 6,80 W, coldwhite



Technical Data

General Characteristics

Material	plastic
Colour	white
Optics	
included in delivery	mounting kit 0,6 m connecting cable

Electrical Characteristics

Power / power consumption	6,80 W / 7,48 W
Input voltage	220-240V AC/50-60Hz
Input current	
Base (standard designation)	
Number of bases	
Power supply unit	incl. LED-power supply unit
Electronically reversible	not dimmable
Connection possibility	Powerplug
Protection class I, II, III	II

Light Technical Data

Bulb	LED-module fixed
Colour Designation	coldwhite
Colour temperature	6500 K
Luminous flux	605 lm
Beam angle	54°
LED type	Standard
LED quantity	121
Spectral power distribution	



23.10.2017

Errors and technical data are subject to change without notice.

Product datasheet

Article no.: 920115

Surface mounted furniture lamp, Unterbauleuchte LED, white, 220-240V AC/50-60Hz, 6,80 W, coldwhite



Light Direction


Rotating and tilting range	fixed
Angle of inclination	0°
Radiation direction	
Reflector / lense	symmetrisch

Dimensions & Weight

Length	550 mm
Width	36 mm
Height	35 mm
Diameter	
Suspensions from ceiling	
Product Weight	277 g

Base dimensions

Length	
Width	
Height	
Diameter	

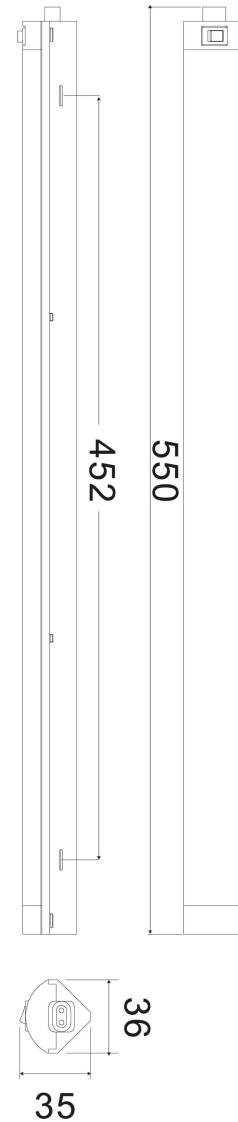

Product datasheet

Article no.: 920115

Surface mounted furniture lamp, Unterbauleuchte LED, white, 220-240V AC/50-60Hz, 6,80 W, coldwhite



Absolute maximum ratings

The LED will get damaged and the lifetime will decrease when you overrun absolute maximum ratings.

Working temperature	-5°C - +40°C
Storage temperature	-10°C - +60°C
IP - Code	IP 20

General product data

Environmental Characteristics

Energy label	A+
Energy consumption	8 kWh/1000h

Lifespan

Lamp life time	25000 h
Luminous flux (end of lifetime)	0,70
Number of switching cycles	100000

IP 20

Protection against penetration of foreign objects > 50 mm. No protection against penetration of water.



Lightings of Protection Class II in which the protection against electric shock is not based solely on the insulation, but additional safety precautions such as additional or reinforced insulation are provided. There are no provisions for the connection of an equipment grounding conductor exists, yet underlying the protection of the facility conditions.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.



The light source of this luminaire may only be replaced by the manufacturer or by a service technician appointed by him or by a comparable qualified person