

Ariel-24 LED




IP65
CE, RoHS

- V** 230Vac
- W** 24W
- Lightbulb icon** LED SMD
- lm** 1420 lumen (4000K)
1350 lumen (3000K)
- Beam angle icon**
- Temperature icon** 105°
- Cable icon** Cable
- Color icon** White
- Material icon** Aluminium
- Ta** -20°C
+45°C



Temp. Col. 4000K
cod. AR8024-NW

Temp. Col. 3000K
cod. AR8024-WW

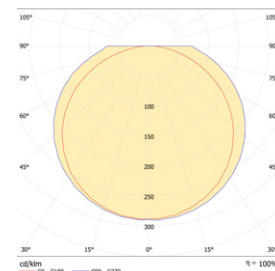



Ariel-24 LED

LED technology Flood light, with slim and stylish design, the IP65 protection makes it suitable for the most varied applications in both indoor and outdoor environments. Thin and light can also be used for track mounting (three lines track adaptor code APL1443). Ideal for lighting buildings entrance, shops windows and every where diffused lighting is need it.

Code	Input Volt	Watt	Luminous flux	CRI	LED Chip	Beam Angle	Body Material	Front Material	Insulation Class	IP Rate	IK Rate
AR8024-NW	230Vac	24W	100 lm/W	Ra>80	SMD LED	105°	Aluminium	Temp. Glass	I	65	07
AR8024-WW	230Vac	24W	100 lm/W	Ra>80	SMD LED	105°	Aluminium	Temp. Glass	I	65	07

ACCESSORY

Track adaptor cod. APL1443

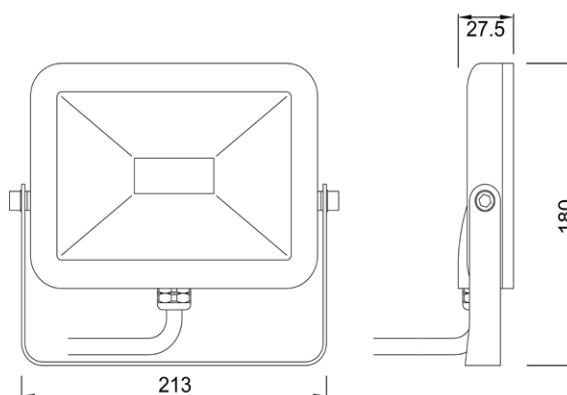

Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso
Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice

Distributed by AMLUX srl, 46042, Castel Goffredo (MN), info@amlux.it, www.amlux.it