


- IP44
- 230V ac
- 30W
- LED
- $\leq$
- $\downarrow$
- Cable
- White
- Aluminium+PC
- 25°C  
+45°C
- 50000 hr (L80B20)



UGR $\leq$ 16					
CRI $\geq$ 80					
 <b>GROUP 0</b> PHOTOBIOLOGICAL SAFETY RISK					
LED <b>140 lm/W</b>					
Questo dispositivo è munito di lampade a LED integrate					
<table style="border: none;"> <tr> <td style="border: 1px solid black; padding: 2px;">A<sup>++</sup></td> <td rowspan="3" style="font-size: 2em; padding: 0 10px;">}</td> <td rowspan="3" style="font-size: 2em; padding: 0 5px;">L E D</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">A<sup>+</sup></td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">A</td> </tr> </table>	A <sup>++</sup>	}	L E D	A <sup>+</sup>	A
A <sup>++</sup>	}			L E D	
A <sup>+</sup>					
A					

LED panel equipped with modular DARK optics. Glare limitation as EN 12464:2011,  $L65 < 1000 \text{ cd} / \text{m}^2$  at  $65^\circ$  in each direction and  $UGR \leq 16$  for video terminal jobs. Light direction control with linear DARK reflector optics for maximum efficiency, perfect shielding and light distribution. High brightness LED, 140lm/W,  $CRI \geq 80$ , available with color temperatures 3000K and 4000K. On-Off version available.

Code	Beam Aperture	Luminous flux	C.C.T.	Dimmer	Body material	Diffuser Material
PNL6060-WW	65°	3672 lm	3000 K	-	Aluminium	PC
PNL6060-NW	65°	3755 lm	4000 K	-	Aluminium	PC

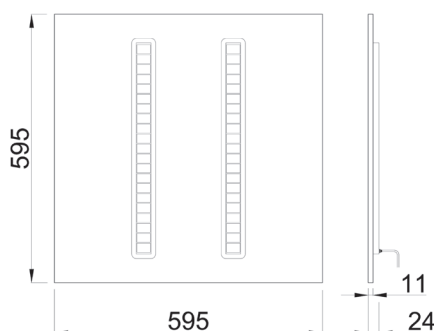

## OPTIONAL ACCESSORIES

Emergency kit  
(1h) cod. KBATT1236-1  
(3h) cod. KBATT1236



Hanging Kit  
cod. APNL6060



Sleeve for ceiling installation  
603x603x55mm  
cod. APL1100



Sleeve for recessed installation  
hole: 600x600mm  
cod. APL1200



Arena Luci s.r.l. si riserva la facoltà di modificare le caratteristiche dei prodotti senza obbligo di preavviso  
*Arena Luci s.r.l. reserve the right to change products specifications at anytime without prior notice*