



MASTER MHN-SA

MASTER MHN-SA 2000W/956 400V XW UNP/1

Compact quartz metal halide lamps with double-pin

Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General information	
Cap base	X830R [X830R]
Operating position	P15 [Parallel +/-15D or Horizontal(HOR)]
Life to 5% failures (nom.)	1000 h
Life to 10% failures (nom.)	1400 h
Life to 20% failures (nom.)	2100 h
Life to 50% failures (nom.)	3700 h
Light technical	
Colour Code	956 [CCT of 5,600 K]
Luminous flux (rated) (nom.)	200000 lm
Colour designation	Daylight
Lumen maintenance 1,000 hours (nom.)	88 %
Lumen maintenance 2,000 hours (nom.)	79 %
Lumen maintenance 5,000 hours (nom.)	70 %
Chromaticity coordinate X (nom.)	330
Chromaticity coordinate Y (nom.)	362
Correlated Colour Temperature (Nom)	5600 K
Luminous efficacy (rated) (nom.)	98 lm/W


Colour rendering index (nom.)	85
Operating and electrical	
Lamp supply voltage	400 V [400]
Power (Rated) (Nom)	2040.0 W
Lamp current run-up (max.)	17 A
Lamp current (EM) (nom.)	11.3 A
Ignition supply voltage (min.)	360 V
Voltage (Max)	220 V
Voltage (Min)	185 V
Voltage (Nom)	205 V
Controls and dimming	
Dimmable	No
Mechanical and housing	
Lamp Finish	Clear
Cap-base information	na [-]

MASTER MHN-SA

Bulb shape	TD40 [TD 40mm]
Approval and application	
Mercury (Hg) content (nom.)	215 mg
Energy consumption kWh/1,000 hours	2244 kWh
UV	
Specific eff. radiant power	60 mW/klm
Luminaire design requirements	
Bulb temperature (max.)	980 °C
Pinch temperature (max.)	300 °C
Pinch Temperature (Max)-DUP(do not use)	300 °C
Product data	
Full product code	871150020079200

Order product name	MASTER MHN-SA 2000W/956 400V XW UNP/1
EAN/UPC – product	8718291548287
Order code	20079200
SAP numerator – quantity per pack	1
Local code description	LAMPADA HALETTO METALICO MHN-SA2000W/956
Numerator – packs per outer box	1
SAP material	928099105129
Net Weight (Piece)	110.000 g
ILCOS code	MN-2000-E-X830R-/H


Dimensional drawing

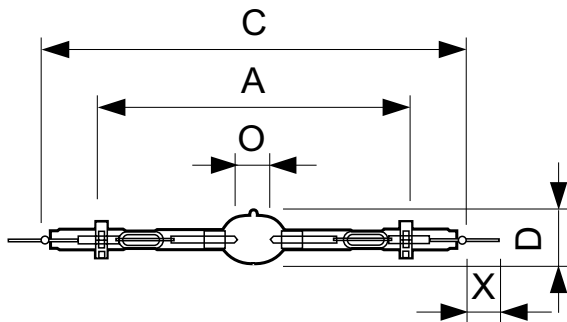

Product	D (max)	O	X	A	C (max)
MASTER MHN-SA 2000W/956 400V XW UNP/1	41 mm	25 mm	25 mm	226 mm	369 mm

MASTER MHN-SA 2000W/956 400V XW UNP/1



Photometric data

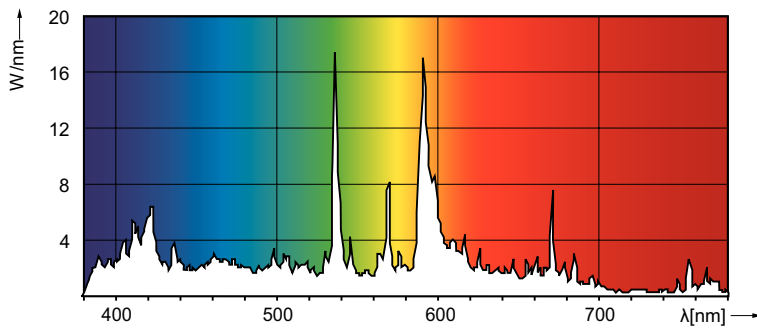

LDPO_MHN-SA_0004-Spectral power distribution Colour

MASTER MHN-SA

Lifetime

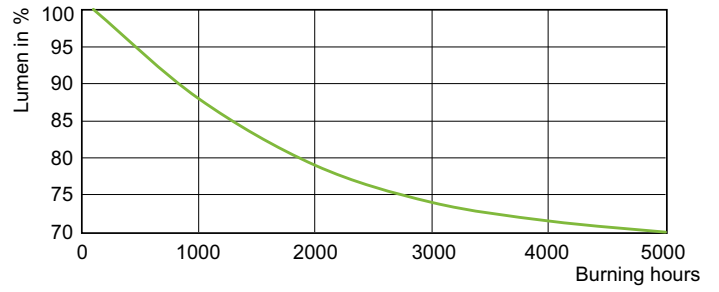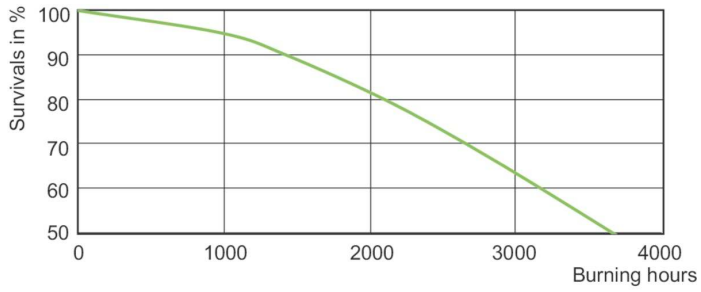

LDLE_MHN-SA_0002-Life expectancy diagram

LDLM_MHN-SA_0002-Lumen maintenance diagram

