


Mini Series

Constant Current LED Driver

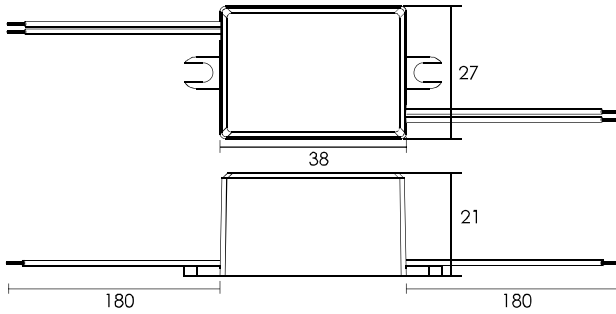

| Model No. | Input voltage (V) | Max. output (W) | Output current (mA) | Output voltage (V) | Power factor (λ) | Efficiency full load (%) | No-load power (W) | Ambient temperature ta (°C) | Max. casing temperature tc (°C) | Isolation | Dimensions LxWxH (mm) | Weight (g) |
|--------------|----------------------|--------------------|------------------------|-----------------------|---------------------|-----------------------------|----------------------|--------------------------------|------------------------------------|-----------|--------------------------|---------------|
| MINI350mA/4W | 100-240 | 4 | 350 | 2-12 | 0.4C | 78 | <0.5 | -20...+50 | 80 | SELV | 38x27x21 | 40 |
| MINI500mA/4W | 100-240 | 4 | 500 | 2-8 | 0.4C | 76 | <0.5 | -20...+50 | 80 | SELV | 38x27x21 | 40 |
| MINI700mA/4W | 100-240 | 4 | 700 | 2-6 | 0.4C | 73 | <0.5 | -20...+50 | 80 | SELV | 38x27x21 | 40 |

- Super compact design
- Universal AC input
- Primary and secondary sides come with leads
- Open circuit, short circuit, over load and overheating protection
- Simple installation
- IP65 design



CB CE IP65