


## MINI Series

# Constant Current LED Driver

### Features:

- Super compact design
- Analogue flicker-free
- Primary and secondary sides come with leads
- Protections: opencircuit, shortcircuit, overload, overtemperature
- SELV equivalent
- Protection class II
- Driver for built-in use
- Suitable for protection class I and II luminaires
- Sealed by glue inside, which can strengthen the protection for luminaires required by waterproof and moistureproof

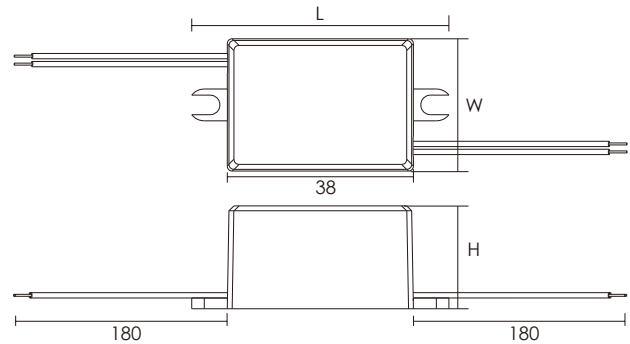

### Parameters:

Model No.	Input voltage (V)	Max. output (W)	Output current (mA)	Output voltage (V)	Power factor (λ)	Efficiency full load (%)	No-load power (W)	Ambient temp. $t_a$ (°C)	Max. case temp. $t_c$ (°C)	Isolation	IP degree	Dimensions LxWxH (mm)	Weight (g)
MINI-4-350	220-240	4	350	6-12	0.60C	77	<0.5	-20...+60	85	SELV	IP65	53x27x21	50
MINI-4-500	220-240	4	500	4-8	0.60C	75	<0.5	-20...+60	85	SELV	IP65	53x27x21	50
MINI-4-700	220-240	4	700	2.5-6	0.60C	74	<0.5	-20...+60	85	SELV	IP65	53x27x21	50
MINI-6-350	220-240	6	350	9-17	0.60C	68	<0.5	-20...+60	90	SELV	IP20	53x27x21	40
MINI-6-500	220-240	6	500	6-12	0.60C	68	<0.5	-20...+60	90	SELV	IP20	53x27x21	40
MINI-6-700	220-240	6	700	4-9	0.60C	68	<0.5	-20...+60	90	SELV	IP20	53x27x21	40



**CB CE IP65 IP20**  
MINI-4 MINI-6