



# MASTER MHN-SE

## MASTER MHN-SE 2000W/956 GX22 400V HO UNP

Very compact quartz metal halide lamps with single-pin GX-22 lamp cap

### Warnings and Safety

- Use only in totally enclosed luminaire, even during testing (IEC61167, IEC 62035, IEC60598)
- The luminaire must be able to contain hot lamp parts if the lamp ruptures
- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

### Product data

General Information	
Cap base	GX22 [ GX22]
Operating position	UNIVERSAL [ Any/Universal]
Life to 5% failures (nom.)	1300 h
Life to 10% failures (nom.)	1650 h
Life to 20% failures (nom.)	2100 h
Life to 50% failures (nom.)	3000 h
Light Technical	
Colour Code	956 [ CCT of 5,600 K]
Luminous flux (rated) (min.)	215000 lm
Luminous flux (rated) (nom.)	227000 lm
Colour designation	Daylight
Lumen maintenance 1,000 hours (nom.)	95 %
Lumen maintenance 2,000 hours (nom.)	91 %
Chromaticity coordinate X (nom.)	334
Chromaticity coordinate Y (nom.)	366
Correlated Colour Temperature (Nom)	5600 K


Luminous efficacy (rated) (nom.)	108 lm/W
Colour-rendering index (min.)	-
Colour rendering index (nom.)	84
Operating and Electrical	
Lamp supply voltage	400 V [ 400]
Power (Rated) (Nom)	2100.0 W
Lamp current (EM) (nom.)	11.5 A
Ignition supply voltage (min.)	360 V
Voltage (Max)	225 V
Voltage (Min)	190 V
Voltage (Nom)	210 V
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Lamp Finish	Clear

# MASTER MHN-SE

Cap-base information	na [-]
<b>Approval and Application</b>	
Energy efficiency label (EEL)	A+
Mercury (Hg) content (nom.)	215 mg
Energy consumption kWh/1,000 hours	2310 kWh
<b>UV</b>	
Specific eff. radiant power	60 mW/klm
<b>Luminaire Design Requirements</b>	
Bulb temperature (max.)	1015 °C
Pinch temperature (max.)	450 °C

<b>Product Data</b>	
Full product code	872790092877800
Order product name	MASTER MHN-SE 2000W/956 GX22 400V HO UNP
EAN/UPC – product	8718291548461
Order code	92877800
Local order code	2000MHNSE956HO
SAP numerator – quantity per pack	1
Numerator – packs per outer box	1
SAP material	928196905130
SAP net weight (piece)	0.152 kg


## Dimensional drawing



Product	D (max)	O	C (max)
MASTER MHN-SE 2000W/956 GX22 400V HO UNP	41 mm	25 mm	198 mm

MHN-SE 2000W/956 GX22 400V HO



## Photometric data

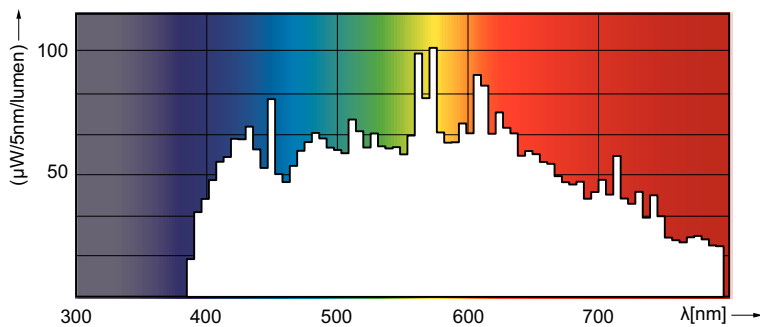

LDPO\_MHN-SE\_2000W\_956-Spectral power distribution Colour

# MASTER MHN-SE

## Lifetime

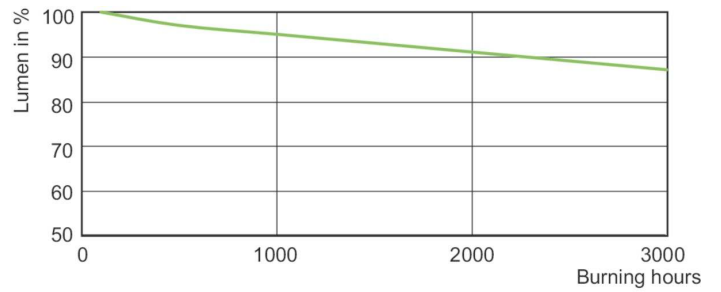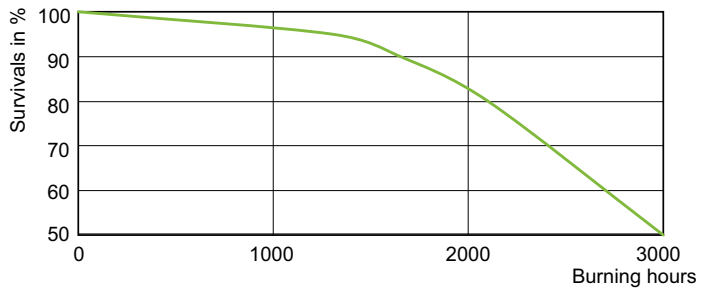

LDLE\_MHN-SE\_0001-Life expectancy diagram

LDLM\_MHN-SE\_0001-Lumen maintenance diagram

