

## Product datasheet

**Article no.: 733055**

Socket Tower, dark gray, 220-240V AC/50-60Hz

### Technical Data

#### General Characteristics

<b>Material</b>	aluminum die casting
<b>Colour</b>	dark gray
<b>Optics</b>	
<b>included in delivery</b>	2 Sockets maximum load 3650 W



#### Electrical Characteristics

<b>Power</b>	
<b>Input Voltage</b>	220-240V AC/50-60Hz
<b>Input current</b>	
<b>Base (standard designation)</b>	
<b>Number of Bases</b>	
<b>Power supply unit</b>	
<b>Connection possibility</b>	Connection box IP67
<b>Protection class I, II, III</b>	I



# Product datasheet

## Article no.: 733055

Socket Tower, dark gray, 220-240V AC/50-60Hz

Ø100

### Light Direction


Rotating and tilting range	
Angle of inclination	
Radiation direction	
Reflector / lense	

### Dimensions & Weight

Length	400,00
Width	0,00
Height	0,00
Diameter	100,00
Product Weight	

### Absolute maximum ratings

Working temperature	-20°C - +50°C
Storage temperature	-10°C - +60°C
IP - Code	IP44

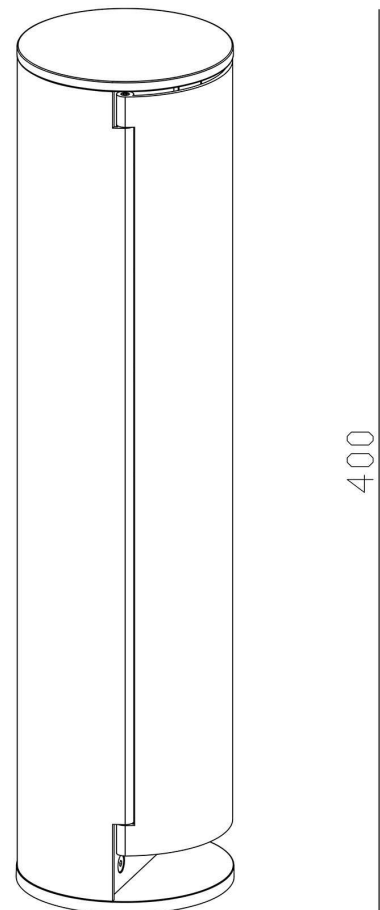

**IP44** Protection against penetration of foreign objects > 1 mm. Protection against penetration of splashing water.



Lightings of Protection Class I in which the protection against electric shock is not based solely on isolation, but an additional safety measure contains such a way that accessible conductive parts are equipped with means for connection to the protective conductor of the fixed installation, so that in case of failure of the basic insulation exposed conductive parts cannot be active.



Because of the complex manufacturing process of the LED the above shown data are just a statistical size, which is not forced to be the realistic data of every LED.