



CE MINI PONY PROFILE 20°/38°
3000°K
 Cod. 9812000005

Handy profile with small dimensions, with 50W LED source, 20°/38° optics, manual regulation of zoom and focus, complete with color frame.

ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

OPTICAL DATA


Number and type of LEDs	1 COB BRIDGELUX
Color temperature	3000 °K
CRI min.	90
Optics	20°/38°

MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	2.8 Kg
Cooling system	AUTOMATIC FAN ASSISTED WITH VARIABLE SPEED
Max noise level	0 - 16 db
Body	EXTRUDED ALUMINIUM AND STEEL SHEET
IP protection rate	IP20

FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-
Stand-alone function	-
Control signal	-

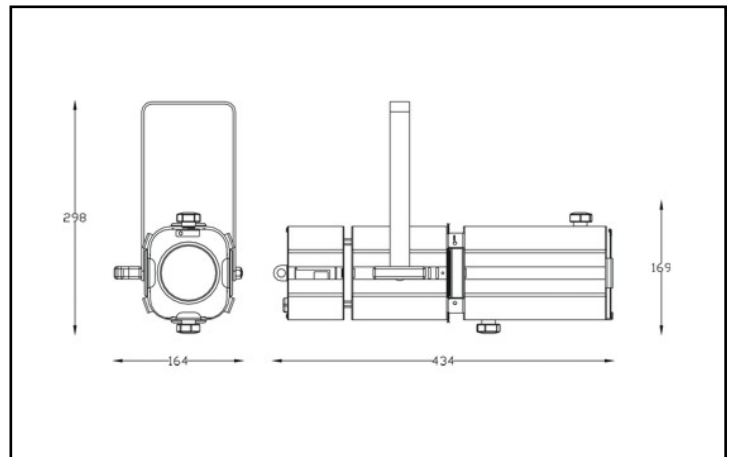

PHOTOMETRIC DATA at minimum zoom - allo zoom minimo

in focus beam - fascio a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	6278	2790	1569	1004	698	512	392	310
Diam. m	0,6	0,9	1,2	1,6	1,9	2,2	2,5	2,8

PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

in focus beam - fascio a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	3758	1670	939	601	418	307	235	186
Diam. m	1,3	2,0	2,7	3,3	4,0	4,7	5,3	6,0