



CE **MINI PONY PROFILE 20°/38°**  
**5000°K**  
 Cod. 9812006505

Handy profile with small dimensions, with 50W LED source, 20°/38° optics, manual regulation of zoom and focus, complete with color frame.

### ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

### OPTICAL DATA


Number and type of LEDs	1 COB BRIDGELUX
Color temperature	5000 °K
CRI min.	90
Optics	20° - 38°

### MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	2.8 Kg
Cooling system	FORCED VENTILATION
Max noise level	0 - 16 db
Body	EXTRUDED ALUMINIUM AND STEEL SHEET
IP protection rate	IP20

### FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-
Stand-alone function	-
Control signal	-

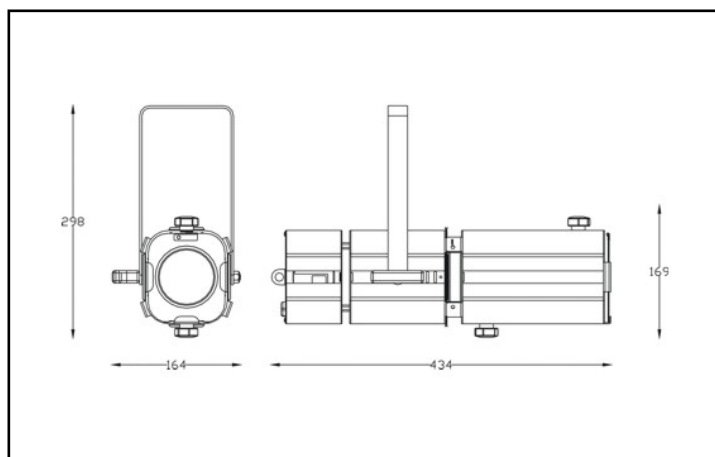

### PHOTOMETRIC DATA at minimum zoom - allo zoom minimo

in focus beam - fascio a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	7313	3250	1828	1170	813	597	457	361
Diam. m	0,6	0,9	1,2	1,6	1,9	2,2	2,5	2,8

### PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

in focus beam - fascio a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	4388	1950	1097	702	488	358	274	217
Diam. m	1,3	2,0	2,7	3,3	4,0	4,7	5,3	6,0