



# MINI PONY F 3000°K

Cod. 9812035205

Handy spotlight with small dimensions, with 50W LED source, fresnel lens, manual regulation of zoom, complete with color frame.

## ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

## OPTICAL DATA


Number and type of LEDs	1 COB BRIDGELUX
Color temperature	3000 °K
CRI min.	90
Optics	13° - 88°

## MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	1.7 Kg
Cooling system	AUTOMATIC FAN ASSISTED WITH VARIABLE SPEED
Max noise level	0 - 16 db
Body	EXTRUDED ALUMINIUM AND STEEL SHEET
IP protection rate	IP20

## FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-
Stand-alone function	-
Control signal	-

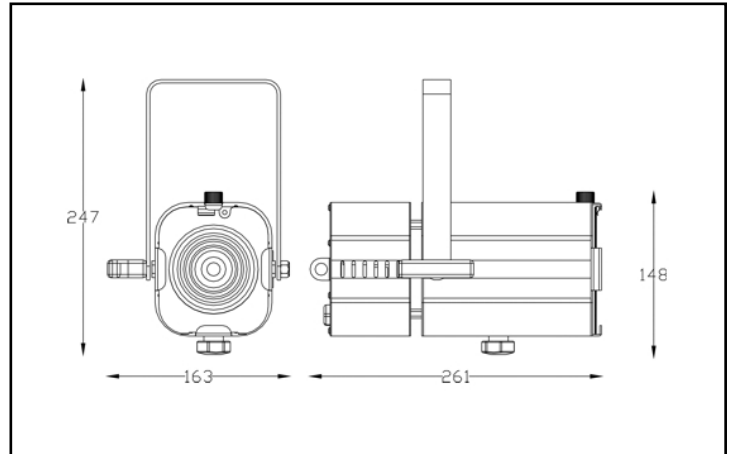

### PHOTOMETRIC DATA at minimum zoom - allo zoom minimo

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	5175	2300	1294	828	575	422	323	256
Diam. m	0,5	0,8	1,1	1,4	1,6	1,9	2,2	2,5

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	5175	2300	1294	828	575	422	323	256
Diam. m	0,9	1,3	1,7	2,1	2,6	3,0	3,4	3,8

### PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	808	359	202	129	90	66	50	40
Diam. m	2,6	3,9	5,2	6,5	7,8	9,1	10,4	11,7

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	808	359	202	129	90	66	50	40
Diam. m	3,5	5,3	7,0	8,8	10,5	12,3	14,0	15,8