



MINI PONY F 5000°K

Cod. 9812036505

Handy spotlight with small dimensions, with 50W LED source, fresnel lens, manual regulation of zoom, complete with color frame.

ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

OPTICAL DATA


Number and type of LEDs	1 COB BRIDGELUX
Color temperature	5000 °K
CRI min.	90
Optics	13° - 88°

MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	1.7 Kg
Cooling system	AUTOMATIC FAN ASSISTED WITH VARIABLE SPEED
Max noise level	0 - 16 db
Body	EXTRUDED ALUMINIUM AND STEEL SHEET
IP protection rate	IP20

FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-
Stand-alone function	-
Control signal	-

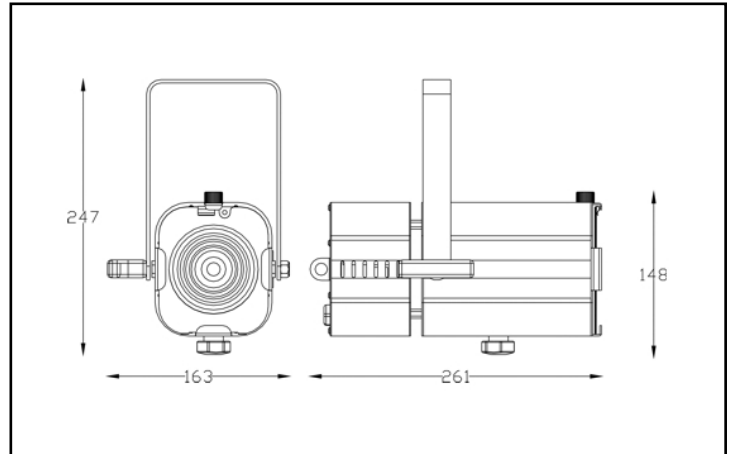

PHOTOMETRIC DATA at minimum zoom - allo zoom minimo

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	6019	2675	1505	963	669	491	376	297
Diam. m	0,5	0,8	1,1	1,4	1,6	1,9	2,2	2,5

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	6019	2675	1505	963	669	491	376	297
Diam. m	0,9	1,3	1,7	2,1	2,6	3,0	3,4	3,8

PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

For 50% of maximum illumination - Fino al 50% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	979	435	245	157	109	80	61	48
Diam. m	2,6	3,9	5,2	6,5	7,7	9,0	10,3	11,6

For 10% of maximum illumination - Fino al 10% dell'illuminamento max

Dist. m	2	3	4	5	6	7	8	9
Lux	979	435	245	157	109	80	61	48
Diam. m	3,4	5,2	6,9	8,6	10,3	12,1	13,8	15,5