



Cod.	Colore	Colore LED	Flusso Sorgente	Apertura Fascio	€
<b>SPOT CON PORTAGELATINA, GHIGLIOTTINE e 1m di CAVO</b>					
9812234102	BIANCO	5600K	7300 lumen	31°/46°	-
9812235202	BIANCO	3000K	6900 lumen	31°/46°	-
9812234104	GRIGIO	5600K	7300 lumen	31°/46°	-
9812235204	GRIGIO	3000K	6900 lumen	31°/46°	-
9812410005	NERO	5600K	7300 lumen	31°/46°	-
9812416605	NERO	3000K	6900 lumen	31°/46°	-

**DMX DALI**  
**MINI PONY PROFILE**


OTTICA 31° / 46°

100-240 V AC 50/60Hz 55 W

CL I IP 20 DMX 512 - DALI


2.8 Kg

Spot maneggevole e orientabile dalle dimensioni compatte con regolazione manuale dello zoom e del focus, sorgente a 1 COB ad alta potenza, controllato con segnali DMX 512 e DALI. Completo di telaio porta gelatina.

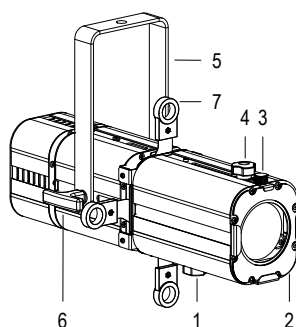

- 1 ZOOM REGOLABILE
- 2 TELAIO PORTA GELATINA
- 3 VOLANO FERMA TELAIO
- 4 FOCUS REGOLABILE
- 5 FORCELLA ORIENTABILE
- 6 FRIZIONE
- 7 GHIGLIOTTINE SAGOMATRICI

**Disegno tecnico**

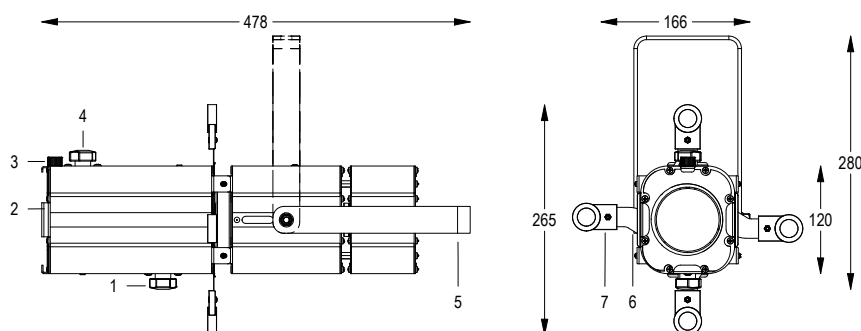

**Dati fotometrici**

Allo zoom minimo

Dist. m	2	4	6	8	10	12
Lux	5075	1269	564	317	203	141
Diam. m	1,2	2,4	3,6	4,8	6,0	7,2

Allo zoom massimo

Dist. m	2	4	6	8	10	12
Lux	2705	676	301	169	108	75
Diam. m	1,8	3,5	5,3	7,1	8,9	10,6

Optica 31°/46°

**Accessori**



**STICK KE2**  
Cod. 29091306  
€ -



**STICK GU2**  
Cod. 29090106  
€ -



**DIAFRAMMA A IRIDE**  
Cod. 1500004500  
€ -



**TELAIO PORTA GOBO**  
Cod. 080100005  
€ -