



CE MINI PONY PROFILE 31°/46°

5000°K

Cod. 9812416505

Handy profile with small dimensions, with 50W LED source, 31°/46° optics, manual regulation of zoom and focus, complete with color frame.

ELECTRICAL DATA

Power supply	100-240Vac 50/60Hz
Max power consumption	0.22 A
Max power	50 W
DMX connection	-
Power connection	1m x 3x1,5mm SILICONE INSULATED CABLE

OPTICAL DATA


Number and type of LEDs	1 COB BRIDGELUX
Color temperature	5000 °K
CRI min.	90
Optics	31°/46°

MECHANICAL DATA

Painting	BLACK WITH EPOXIDIC POWDER
Net weight	2.8 Kg
Cooling system	AUTOMATIC FAN ASSISTED WITH VARIABLE SPEED
Max noise level	0 - 16 db
Body	DIE-CAST ALUMINIUM
IP protection rate	IP20

FUNCTIONAL DATA

Working position	+/-90°
Max ambient temperature	35 °C
Thermal protection	ELECTRONIC
Colors and dimmer resolution	-

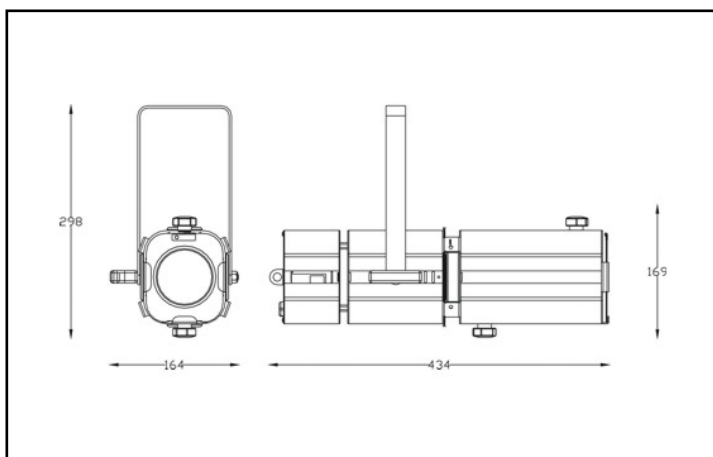

PHOTOMETRIC DATA at minimum zoom - allo zoom minimo

in focus beam - diametro a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	6525	2900	1631	1044	725	533	408	322
Diam. m	1,1	1,6	2,1	2,7	3,2	3,7	4,2	4,8

PHOTOMETRIC DATA at maximum zoom - allo zoom massimo

in focus diameter - diametro a fuoco

Dist. m	2	3	4	5	6	7	8	9
Lux	4365	1940	1091	698	485	356	273	216
Diam. m	1,6	2,4	3,2	4,0	4,8	5,6	6,4	7,2