


**JP**

- Only for Use in Approved Enclosed Halogen Fixtures
- Recessed Single Contact Base - R7s-12
- Operate Horizontal ±4°
- T2.5, T3 & T4



Watts	Ushio Lamp Description	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish
		Dia (A)	MOL (B)	C-to-C (C)					
<b>R7s-12 Base – MOL ≈ 4 11/16" (119.6mm)</b>									
500	FDN, JP120V-500WCF6	12.0	119.6	114.2	C-8	12500	3200	400	Frosted
<b>500</b>	<b>FDF, JP120V-500WC6</b>	<b>12.0</b>	<b>119.6</b>	<b>114.2</b>	<b>C-8</b>	<b>13250</b>	<b>3200</b>	<b>400</b>	<b>Clear</b>
500	JP220V-500WC*	12.0	119.6	114.2	C-8	12500	3200	200	Clear
550	JP225V-550WC*	12.0	119.6	115.6	C-8	14000	3200	250	Clear
750	EMD, JP120V-750WCF	12.0	119.6	114.2	C-8	19500	3200	400	Frosted
750	EJG, JP120V-750WC	12.0	119.6	114.2	C-8	20600	3200	400	Clear
800	EMF, JP240V-800WCF	12.0	119.6	114.2	C-8	21400	3200	250	Frosted
800	EME, JP240V-800WC1UA	12.0	119.6	114.2	C-8	22000	3200	250	Clear
1000	FCM, JP120V-1000WC1	12.0	119.6	114.2	C-8	27000	3200	300	Clear
1000	FHM, JP120V-1000WCF1	12.0	119.6	114.2	C-8	26000	3200	300	Frosted
1000	EJD, JP185V-1000WS*	12.0	119.6	114.2	C-8	33600	3350	100	Clear

\* Special Order Item

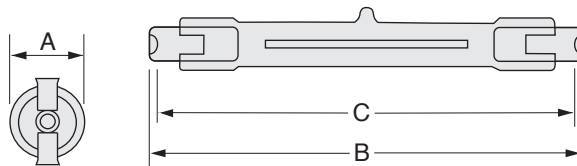

R7s-12


**JP**

- Only for Use in Approved Enclosed Halogen Fixtures
- Recessed Single Contact Base - R7s-12
- Operate Horizontal ±4°
- T2.5, T3 & T4



Watts	Ushio Lamp Description	Dimensions mm			Filament Type	Approx Lumens lm	Color Temp K	Avg Life h	Bulb Finish
		Dia (A)	MOL (B)	C-to-C (C)					
<b>R7s-12 Base – MOL ≈ 4 11/16" (119.6mm)</b>									
500	FDN, JP120V-500WCF6	12.0	119.6	114.2	C-8	12500	3200	400	Frosted
<b>500</b>	<b>FDF, JP120V-500WC6</b>	<b>12.0</b>	<b>119.6</b>	<b>114.2</b>	<b>C-8</b>	<b>13250</b>	<b>3200</b>	<b>400</b>	<b>Clear</b>
500	JP220V-500WC*	12.0	119.6	114.2	C-8	12500	3200	200	Clear
550	JP225V-550WC*	12.0	119.6	115.6	C-8	14000	3200	250	Clear
750	EMD, JP120V-750WCF	12.0	119.6	114.2	C-8	19500	3200	400	Frosted
750	EJG, JP120V-750WC	12.0	119.6	114.2	C-8	20600	3200	400	Clear
800	EMF, JP240V-800WCF	12.0	119.6	114.2	C-8	21400	3200	250	Frosted
800	EME, JP240V-800WC1UA	12.0	119.6	114.2	C-8	22000	3200	250	Clear
1000	FCM, JP120V-1000WC1	12.0	119.6	114.2	C-8	27000	3200	300	Clear
1000	FHM, JP120V-1000WCF1	12.0	119.6	114.2	C-8	26000	3200	300	Frosted
1000	EJD, JP185V-1000WS*	12.0	119.6	114.2	C-8	33600	3350	100	Clear

\* Special Order Item

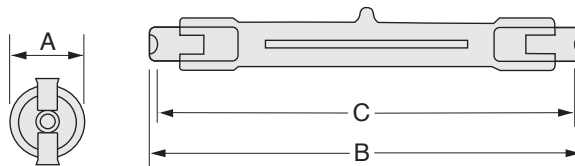

R7s-12